




# MINERAL INSULATED THERMOCOUPLES W/ TERMINAL BLOCK

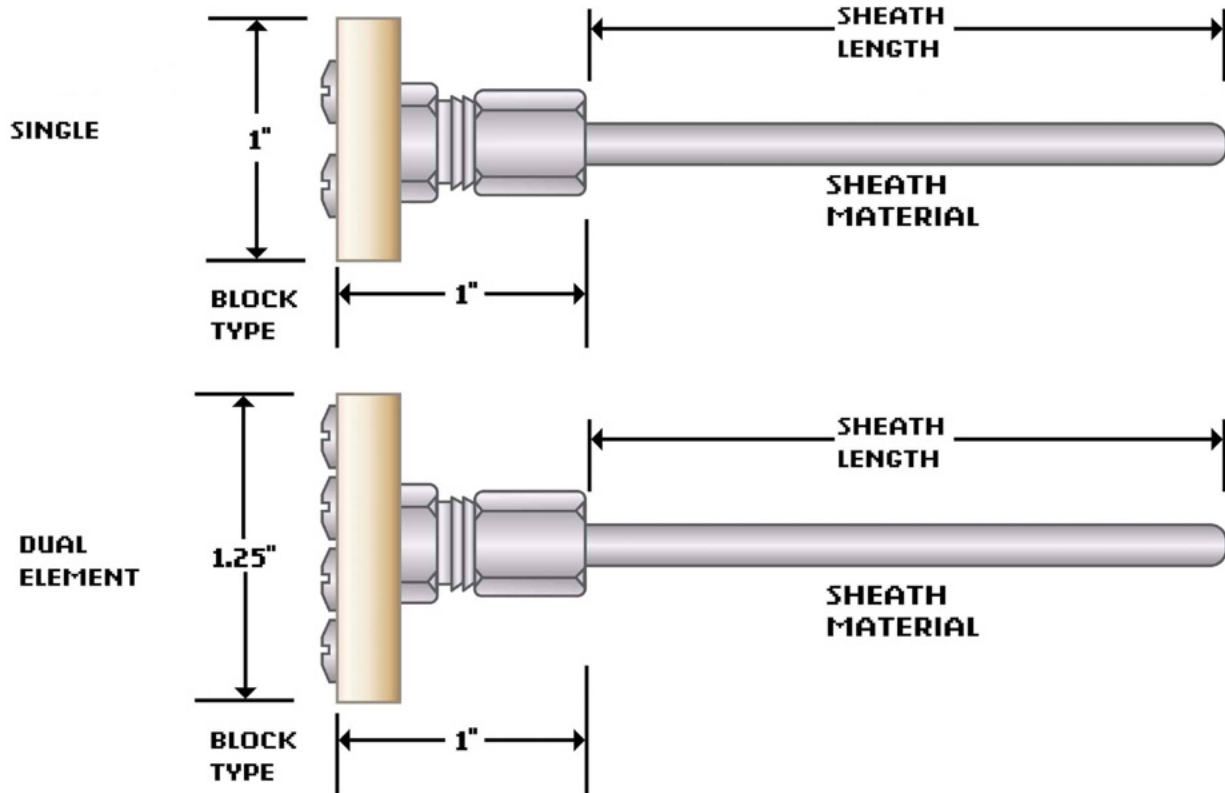

## LEAD LENGTH

Length:

Units:

## CALIBRATION

- Type J       Type T       Type J (Dual)       Type T (Dual)
- Type K       Type E       Type K (Dual)       Type E (Dual)

## SHEATH DIAMETER

- 0.062" (1.6mm)(1/16")
- 0.125" (3.2mm) (1/8")
- 0.188" (4.8mm) (3/16") (standard)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- 0.375" (9.5mm) (3/8")
- Custom

## SHEATH MATERIAL

- 304 SS       310 SS
- 316 SS       Hastelloy
- Inconel 600
- 446 SS

## JUNCTION

- Grounded
- Ungrounded
- Exposed
- Exposed & recessed

## SHEATH LENGTH

Length:

Units:

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## LEAD LENGTH

- Terminal Block