


COMPRESSION FITTINGS


BRASS COMPRESSION FITTINGS

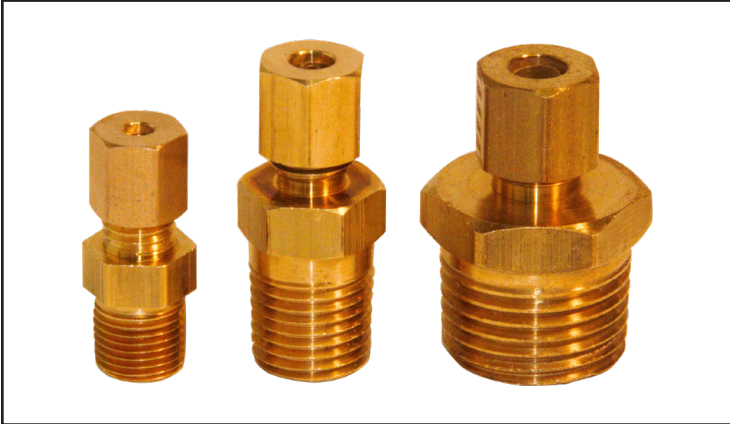

**NON-ADJUSTABLE
COMPRESSION FITTINGS**

Non-adjustable compression fittings are useful to allow the exact immersion length to be set in the field during sensor installation. When tightened, the compression sleeve and thermocouple sheath are deformed, so the fitting cannot be relocated after.


STAINLESS COMPRESSION FITTINGS

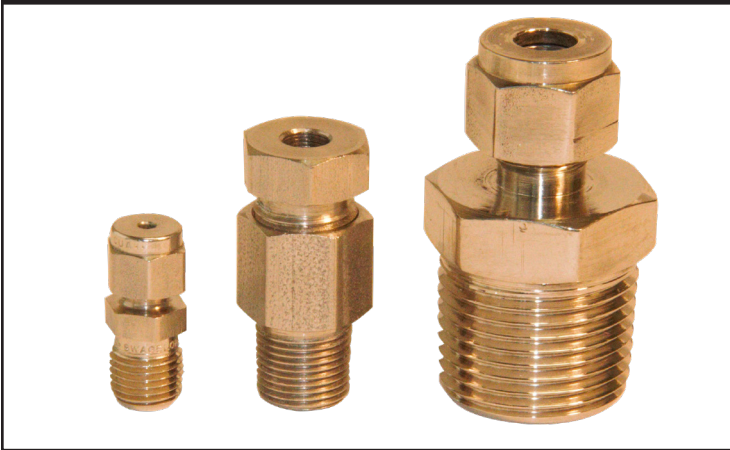


NPT THREAD DIMENSIONS

MEASURE THE DIAMETER AT THE THICKER END OF THE TAPERED THREAD

NPT THREADS	
NPT THREAD SIZE	D DIMENSION
1/16"NPT	0.313"
1/8"NPT	0.405"
1/4"NPT	0.540"
3/8"NPT	0.675"
1/2"NPT	0.840"

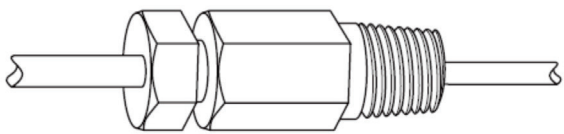

SINGLE THREADED



CAP



FERRULE



BODY

COMPRESSION FITTING - ORDER CODE

CFX X X

MATERIAL	INSIDE DIAMETER	THREAD
B - BRASS	1 - 1/8"	1 - 1/8" NPT
S - STAINLESS	2 - 3/16"	2 - 1/4" NPT
	3 - 1/4"	3 - 3/8" NPT
		4 - 1/2" NPT