


AMAG - MAGNET STYLE THERMOCOUPLES + RTD's

AMAG STYLE - MAGNET

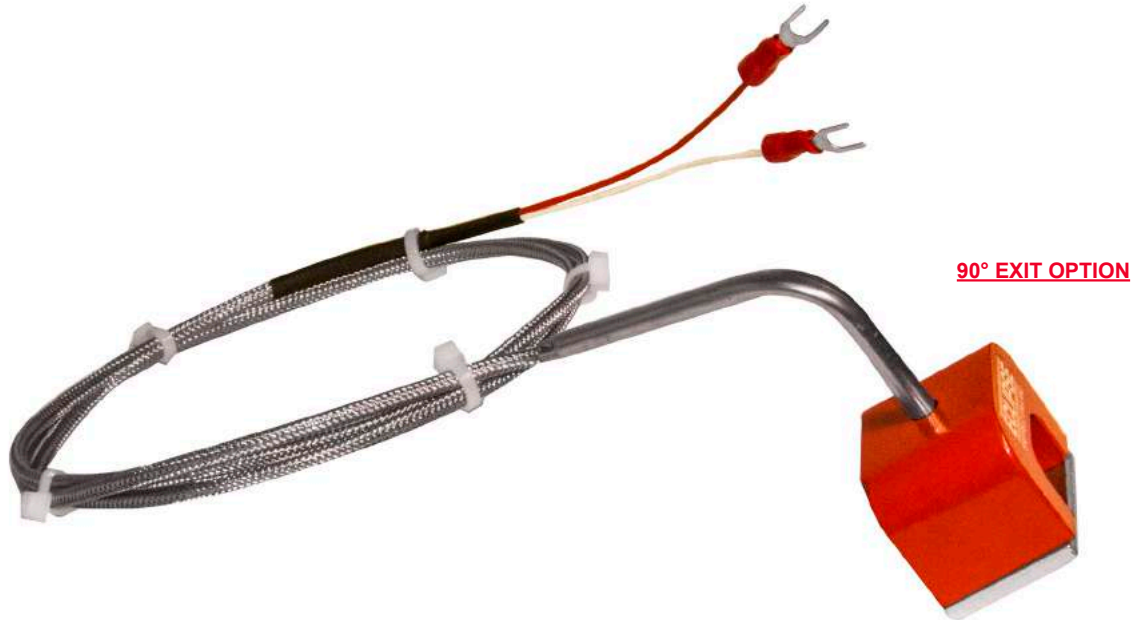

STANDARD FEATURES


1.75" x 1.2" MAGNET SENSOR
 GROUNDED SENSOR
 24 AWG FIBERGLASS LEADS
 WITH STAINLESS STEEL BRAID
 STRIPPED LEADS

OPTIONS - AMAG

THERMOCOUPLE TYPE OPTIONS
 Type J Type K
 Type T 2 or 3 Wire RTD
 CUSTOM LEAD LENGTH/ MATERIAL
 TERMINATION OPTIONS
 SEE NEXT PAGE
 UNGROUNDED
 90° EXIT
 MgO MINERAL INSULATED
 SPECIAL OPTIONS AVAILBLE UPON REQUEST

STOCK - AMAG				
TYPE	JUNCTION	Length (A)	PART# (c/w bare wire)	PART# (c/w male plug)
J	Grounded	36"	AMAGJ-36-0-B	AMAGJ-36-2-B
J	Grounded	48"	AMAGJ-48-0-B	AMAGJ-48-2-B
J	Grounded	72"	AMAGJ-72-0-B	AMAGJ-72-2-B
J	Grounded	96"	AMAGJ-96-0-B	AMAGJ-96-2-B
J	Grounded	120"	AMAGJ-120-0-B	AMAGJ-120-2-B
J	Grounded	144"	AMAGJ-144-0-B	AMAGJ-144-2-B
J	Grounded	180"	AMAGJ-180-0-B	AMAGJ-180-2-B
J	Grounded	240"	AMAGJ-240-0-B	AMAGJ-240-2-B

AMAG - DIMENSIONS

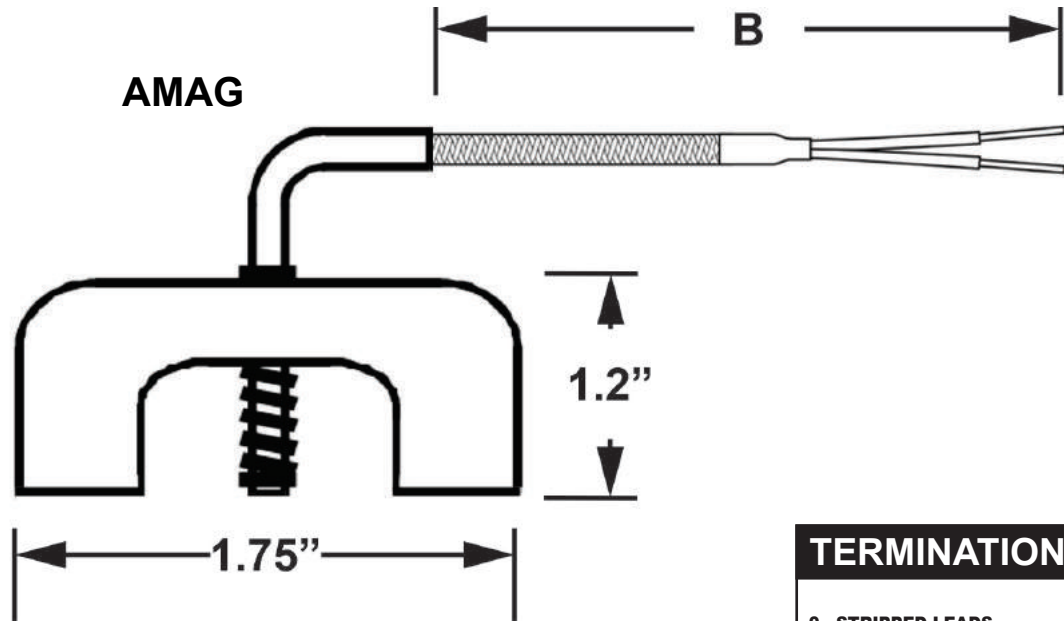

AMAG - SENSOR TIP



TERMINATIONS

0 - STRIPPED LEADS

1 - FORK TERMINALS

2 - STANDARD MALE PLUG

3 - STANDARD FEMALE

4 - MINI MALE PLUG

5 - MINI FEMALE JACK

AMAG - ORDER CODE

AMAGX	-	D	-	A	-	X	-	X
TYPE		LENGTH		TERMINATION		LEADS		OPTIONS
J - TYPE J		48 - 48"		0 - STRIPPED LEADS		F - FIBERGLASS		90 - 90°EXIT
K - TYPE K		72 - 72"		1 - FORK TERMINALS		B - STAINLESS BRAID		MI - MgO MINERAL INSULATED
T - TYPE T		96 - 96"		2 - STANDARD MALE PLUG		H - STAINLESS HOSE		
RTD2 - PT100		120 - 120"		3 - STANDARD FEMALE JACK		T - TEFLON		
RTD3 - PT100		X - CUSTOM		4 - MINI MALE PLUG		S - FIBERGLASS STRANDED		
				5 - MINI FEMALE JACK				

****Standard Lead Time for Custom Parts 3-5 days MFG****
If you need something that is not listed, contact us! We can probably make it