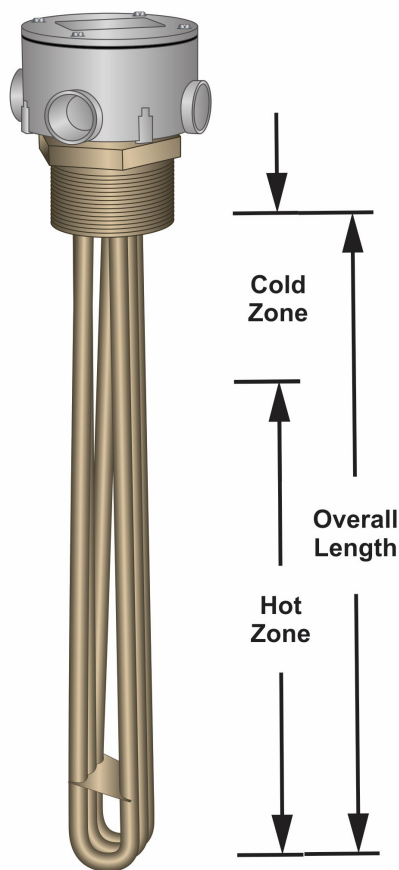


2-1/2" NPT SCREWPLUG HEATER

**INFORMATION**

- Durable, efficient chemical heater
- 316 stainless steel or titanium elements suitable for use in most aqueous alkaline solutions and rinse tanks
- 2-1/2 inch screwplug heater
- Power range: 4500-18000 watts
- Operates on 240-480 volts

FEAUTRES

- 316 stainless steel or titanium elements suitable for use in most aqueous alkaline solutions and rinse tanks
- Watt densities:
- 316 stainless steel: 45-55 watts/square inch
- Titanium: <60 watts/square inch
- Vapor resistant, flame retardant PVC terminal enclosure
- Grounded construction



STANDARD PARTS

MPI P/N	MATERIAL	WATTS	VOLTS	OVERALL LENGTH	THREAD SIZE
IM-5T4.5212	Stainless Steel	4500 W	240 V	12 "305 mm	2-1/2" NPT
IM-5T4.5412	Stainless Steel	4500 W	480 V	12 "305 mm	2-1/2" NPT
IM-5T6218	Stainless Steel	6000 W	240 V	18 "460 mm	2-1/2" NPT
IM-5T6418	Stainless Steel	6000 W	480 V	18 "460 mm	2-1/2" NPT
IM-5T9225	Stainless Steel	9000 W	240 V	25 "635 mm	2-1/2" NPT
IM-5T9425	Stainless Steel	9000 W	480 V	25 "635 mm	2-1/2" NPT
IM-5T12232	Stainless Steel	12,000 W	240 V	32 "815 mm	2-1/2" NPT
IM-5T12432	Stainless Steel	12,000 W	480 V	32 "815 mm	2-1/2" NPT
IM-5T15240	Stainless Steel	15,000 W	240 V	40 "1015 mm	2-1/2" NPT
IM-5T15440	Stainless Steel	15,000 W	480 V	40 "1015 mm	2-1/2" NPT
IM-5T18248	Stainless Steel	18,000 W	240 V	48 "1220 mm	2-1/2" NPT
IM-5T18448	Stainless Steel	18,000 W	480 V	48 "1220 mm	2-1/2" NPT
IM-T5T6218	Titanium	6000 W	240 V	18 "460 mm	2-1/2" NPT
IM-T5T6418	Titanium	6000 W	480 V	18 "460 mm	2-1/2" NPT
IM-T5T9225	Titanium	9000 W	240 V	25 "635 mm	2-1/2" NPT
IM-T5T9425	Titanium	9000 W	480 V	25 "635 mm	2-1/2" NPT
IM-T5T12232	Titanium	12,000 W	240 V	32 "815 mm	2-1/2" NPT
IM-T5T12432	Titanium	12,000 W	480 V	32 "815 mm	2-1/2" NPT
IM-T5T18248	Titanium	18,000 W	240 V	48 "1220 mm	2-1/2" NPT
IM-T5T18448	Titanium	18,000 W	480 V	48 "1220 mm	2-1/2" NPT

3-phase standard, single phase available.

3-4 Week Lead Time for Standard & Custom Products!

ORDER CODE

IM-XX	XX	X	XX		
SERIES	WATTAGE	VOLTAGE	OVERALL LENGTH	PHASE / OPTIONS	
5T 316 stainless steel	4.5 4500W	2 240V	12 4.5kW	No designator = Three Phase (std)	
T5T Titanium	6 6000W	3 380V	13 6kW	-1 = single phase power	
IN5T Incoloy	9 9000W	4 480V	17 6kW	-M2 = Explosion / Moisture Resisting Housing	
	12 12000W	5 415V	23 9kW	-W = Thermowell	
	15 15000W	6 600V	25 9kW	-T2 = Integral thermostat	
	18 18000W	7 400V	28 12kW		
			8 208V	32 12kW	EX. IM-T5T18248 2-1/2" NPT
		9 220V	38 18kW	SCREWPLUG Immersion Heater, 18kW, 240V, 3PH, 48" Overall Length	
		0 200V	40 15kW		
			40 18kW		