




# ADJUSTABLE BAYONET SPRING RTD'S

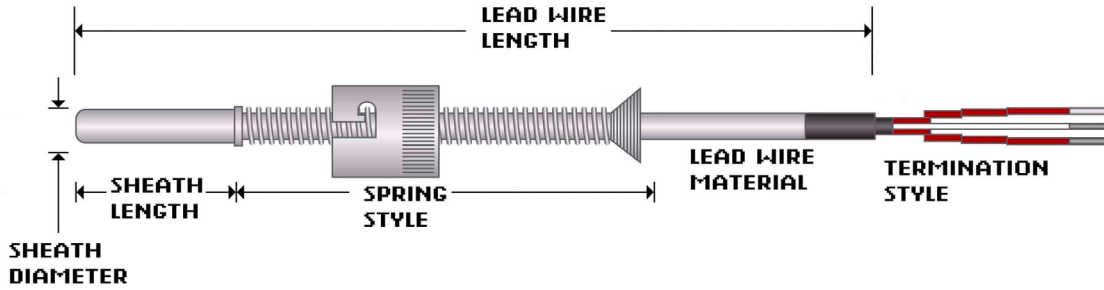

## ELEMENT TYPE

- 100 Ω
- 120 Ω
- 1000 Ω
- 10 Ω
- 500 Ω

## WIRE CONFIGURATION

- 2-wire
- 3-wire
- 4-wire
- 2-wire (Dual)
- 3-wire (Dual)

## SHEATH LENGTH

- 1/4"
- 1"
- 3/8" (Standard)
- 1.25"
- 1/2"
- 1.5"
- 5/8"
- 1.75"
- Y 3/4"
- 2"

## LEAD LENGTH (SPECIFY)

Length:

Units:

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## CAP SIZE

- 7/16"ID Single Slot (1/4"OD Spring)
- 12.5mmID Double Slot (1/4"OD Spring)
- 14.7mmID Double Slot (1/4"OD Spring)

## SHEATH DIAMETER

- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- Custom – Specify in Message

## LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)

## TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

## SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector
- Silver solder thermocouple junction