




# ADJUSTABLE BAYONET ARMOR W/ POSITIVE INDICATING CAP

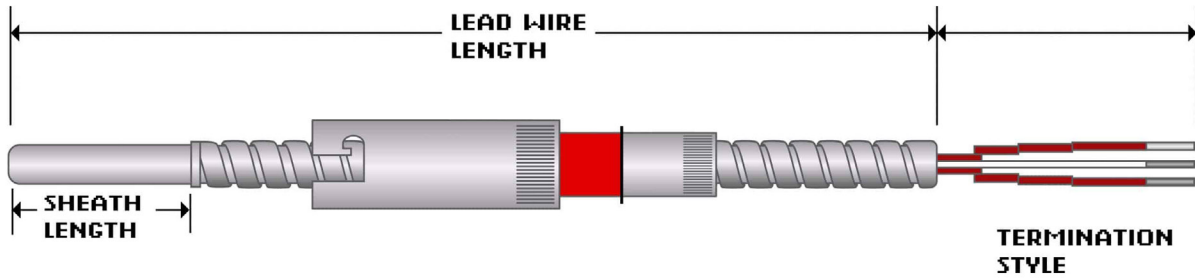

## CALIBRATION

Type J	Type E
Type K	
Type T	

## ARMOR CABLE DIAMETER /

0.210"OD/ Positive indicating bayonet cap w/ Red indicator
0.210"OD/ Positive indicating bayonet cap w/ Green indicator
0.275"OD/ Positive indicating bayonet cap w/ Red indicator

## SHEATH LENGTH

1/4"	1"
3/8" (Standard)	1.25"
1/2"	1.5"
5/8"	1.75"
Y 3/4"	2"

## SHEATH DIAMETER

0.118" (3mm)	0.236" (6mm)
0.125" (3.2mm) (1/8")	0.250" (6.4mm) (1/4")
0.156" (4mm)	0.314" (8mm) (5/16")
0.188" (4.8mm) (3/16") (standard)	Custom – Specify in Message

## LEAD LENGTH (SPECIFY)

Length:

Units:

## LEAD WIRE MATERIAL

Fiberglass (800°F)	Fiberglass with stainless steel braid (800°F) (standard)
Teflon (400°F)	Teflon with stainless steel v braid (400°F)
Kapton (500°F)	
High temperature fiberglass (1200°F)	

## JUNCTION

- Grounded, flat tip
- Grounded, round tip
- Grounded, drill point
- Ungrounded, round tip
- Ungrounded, drill point
- Ungrounded, flat tip

## TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## SPECIAL FEATURES

None	Bx Connector
Solid conductor (Lead wire)	Mating connector
Flat tip probe	Moisture protection boot on connector
Drill point tip	Add ground wire to TC & RTD
Epoxy seal	Silver solder thermocouple junction
Cable Clamp	