




ADJUSTABLE PIPE CLAMP THERMOCOUPLES

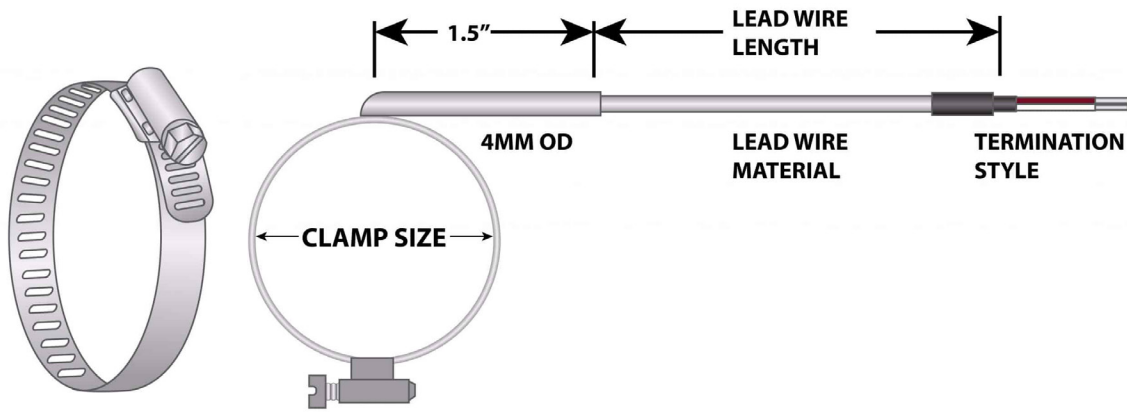

CALIBRATION

Type J Type E
 Type K
 Type T

LEAD LENGTH (SPECIFY)

Length:

Units:

LEAD WIRE MATERIAL

Fiberglass (800°F)	(400°F)
Teflon (400°F)	Fiberglass with armor cable
Kapton (500°F)	(800°F) (standard)
High temperature fiberglass	Teflon with armor cable (400°F)
(1200°F)	Fiberglass with stainless steel
Fiberglass with stainless steel	braid with armor cable (800°F)
braid (800°F)	Teflon with stainless steel braid
Teflon with stainless steel braid	with armor cable (400°F)

JUNCTION

Grounded
 Ungrounded
 Grounded (Dual Sensor)
 Ungrounded (Dual Sensor)

TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

CLAMP SIZE

7/32" to 5/8"	1-15/16" to
7/16" to 25/32"	2-1/2"
1/2" to 29/32"	Custom –
11/16" to 1-1/4"	Specify in
15/16" to 1-1/2"	Message
1-7/16" to 2"	
1-11/16" to 2-1/4"	

SPECIAL FEATURES

None
 Solid conductor (Lead wire)
 Cable Clamp
 Bx Connector
 Mating connector
 Moisture protection boot on connector
 Add ground wire to TC & RTD

REQUIRED LEAD TIME

1.5-2 weeks (standard)
 1 week expedited mfg
 3-4 days expedited mfg
 1-2 days expedite mfg
 Same day expedited mfg