




# ARBURG STYLE THERMOCOUPLES

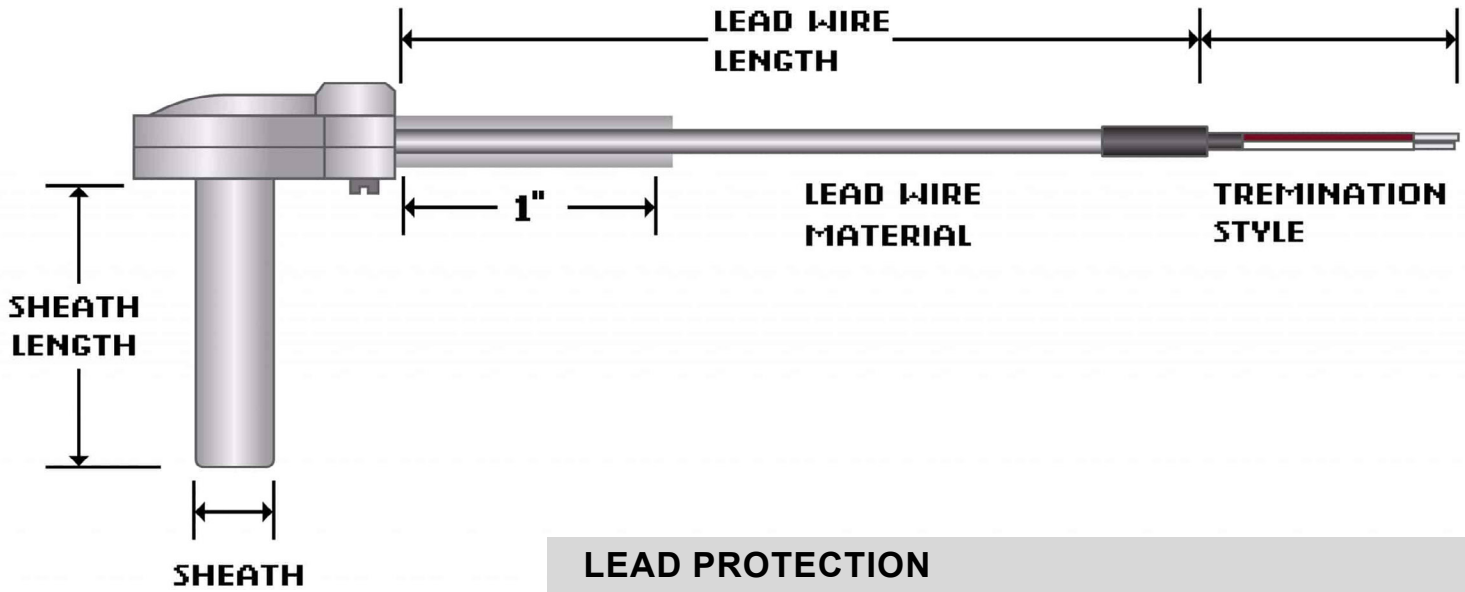

## LEAD PROTECTION

## CALIBRATION

Type J	Type T
Type K	Type E

## CONSTRUCTION STYLE

Standard cap – 6 inch spring  
 Standard cap – 12 inch spring

## SHEATH DIAMETER

3/16 inch

## JUNCTION

Grounded, flat tip  
 Grounded, round tip  
 Grounded, drill point  
 Ungrounded, round tip  
 Ungrounded, drill point  
 Ungrounded, flat tip

## SHEATH LENGTH

1 inch

## LEAD LENGTH (IN WHOLE INCHES)

Length:

- Fiberglass (24 gauge stranded)
- Fiberglass with stainless steel overbraid (24 gauge stranded)
- Fiberglass (20 gauge stranded)
- Fiberglass with stainless steel overbraid (20 gauge stranded)
- PFA (24 gauge stranded)
- PFA with stainless steel overbraid (24 gauge stranded)
- PFA (20 gauge stranded)
- PFA with stainless steel overbraid (20 gauge stranded)

## TERMINATIONS/OPTIONS

- |  |  |
|--|--|
| Standard, 2-1/2 inch split leads                           | Standard female jack, quick disconnect                       |
| 2-1/2 inch split leads with #6 spade lugs                  | Miniature male plug, quick disconnect (24 gauge wire only)   |
| 2-1/2 inch split leads with #6 spade lugs and BX connector | Miniature female jack, quick disconnect (24 gauge wire only) |
| Standard male plug, quick disconnect                       | 1/4 inch push-on connector                                   |

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg