




# BRASS BRACKET THERMOCOUPLES

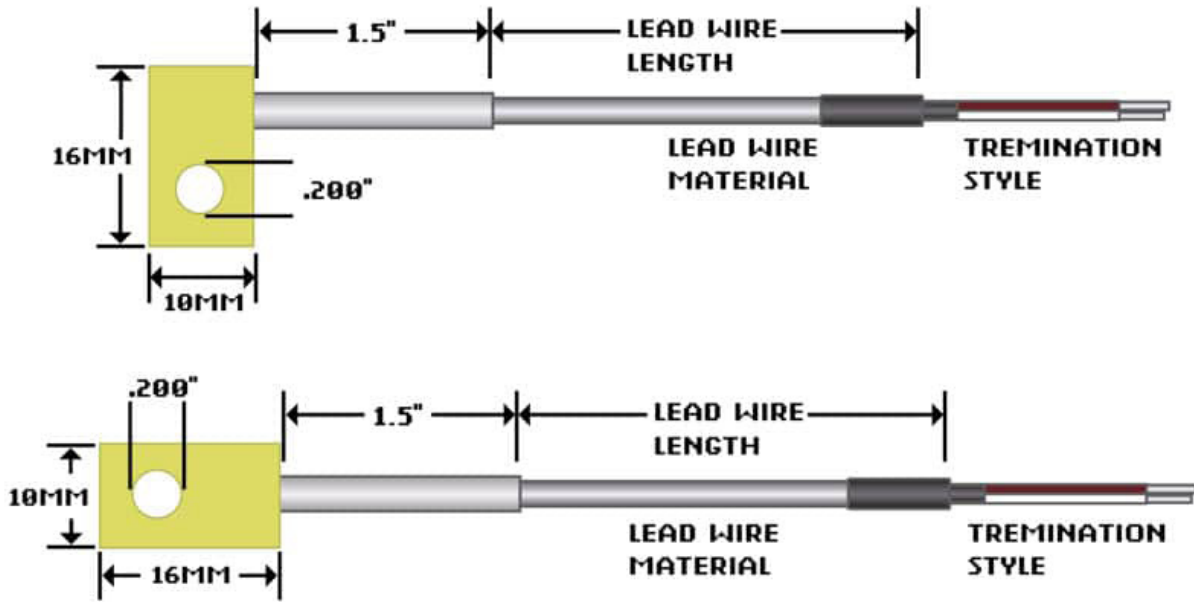

## CALIBRATION

Type J	Type E
Type K	
Type T	

## LEAD LENGTH (SPECIFY)

Length:

Units:

## LEAD WIRE MATERIAL

Fiberglass (800°F)	(400°F)
Teflon (400°F)	Fiberglass with armor cable
Kapton (500°F)	(800°F) (standard)
High temperature fiberglass	Teflon with armor cable (400°F)
(1200°F)	Fiberglass with stainless steel
Fiberglass with stainless steel	braid with armor cable (800°F)
braid (800°F)	Teflon with stainless steel braid
Teflon with stainless steel braid	with armor cable (400°F)

## JUNCTION

Grounded (standard)
Exposed

## BRACKET TYPE

Straight brass mounting bracket  
(10MM wide x 16MM long)  
90 degree brass mounting bracket  
(10MM wide x 16MM long)

## TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

## SPECIAL FEATURES

- None
- Solid conductor (Lead wire)
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector
- Add ground wire to TC & RTD

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg