



COIL HEATERS


STANDARD FEATURES

- STAINLESS STEEL SHEATH
- 39"TEFLON INSULATED LEADS
- c/c SILICONE COATED F/G SLEEVING
- FLAT PROFILE FOR EXCELLENT HEAT TRANSFER
- GROUND WIRE

OTHER OPTIONS

- THERMOCOUPLE "J"
- EXIT CONFIGURATIONS
- LEADWIRE PROTECTION
- GROUND WIRE
- CUSTOM COLD SECTION
- CUSTOM LENGTHS

EXITS

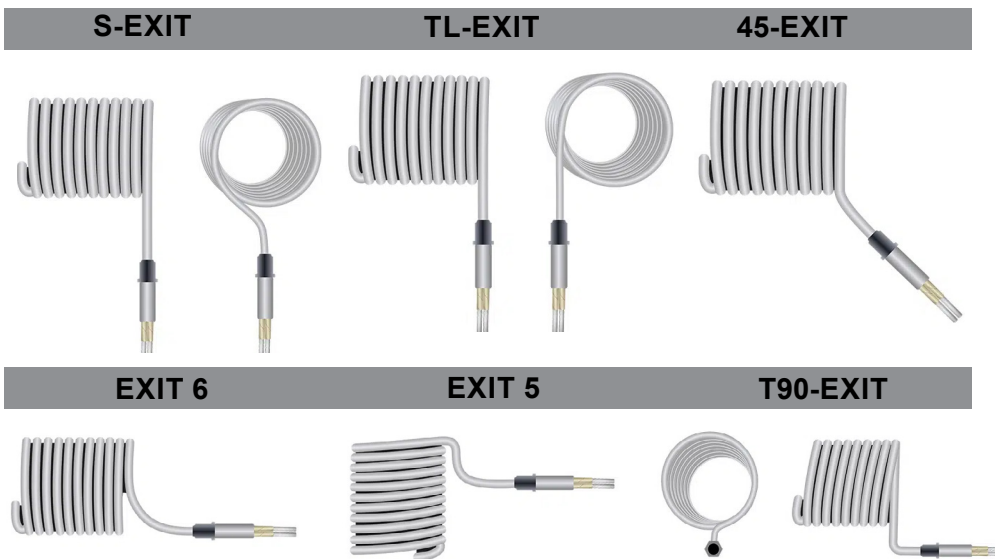

HEATER LENGTH

Square Coil 0.13"x0.13" (3.3x3.3mm) – Max Length					
Dia	1"W	2"W	3"W	4"W	5"W
0.500"	15"(387mm)	30"(774mm)	46"(1161mm)	61"(1541mm)	76"(1934mm)
0.750"	21"(539mm)	42"(1079mm)	64"(1618mm)	85"(2157mm)	106" (2696mm)
0.875"	24"(617mm)	49"(1235mm)	73"(1852mm)	97"(2470mm)	122" (3087mm)
1.000"	27"(694mm)	55"(1387mm)	82"(2081mm)	109"(2774mm)	137" (3468mm)
1.250"	33"(848mm)	67"(1696mm)	100"(2544mm)	134"(3392mm)	167" (4240mm)
1.500"	39"(1000mm)	79"(2001mm)	118"(3001mm)	158"(4001mm)	197" (5002mm)
1.750"	45"(1155mm)	91"(2309mm)	136"(3464mm)	182"(4619mm)	227" (5774mm)
2.000"	51"(1307mm)	103"(2614mm)	154"(3921mm)	206"(5228mm)	257" (6536mm)
Flat Coil 0.087"x0.165" (2.2x4.2mm) – Max Length					
Dia	1"W	2"W	3"W	4"W	5"W
0.500"	11"(284mm)	22"(568mm)	34"(852mm)	45"(1136mm)	56"(1419mm)
0.750"	16"(405mm)	32"(810mm)	48"(1214mm)	64"(1619mm)	80" (2024mm)
0.875"	18"(465mm)	37"(930mm)	55"(1396mm)	73"(1861mm)	92" (2326mm)
1.000"	21"(526mm)	41"(1051mm)	62"(1577mm)	83"(2103mm)	103" (2628mm)
1.250"	25"(647mm)	51"(1292mm)	76"(1940mm)	102"(2586mm)	127" (3233mm)
1.500"	30"(767mm)	60"(1535mm)	91"(2302mm)	121"(3070mm)	151" (3837mm)
1.750"	35"(888mm)	70"(1777mm)	105"(2665mm)	140"(3554mm)	175" (4442mm)
2.000"	40"(1009mm)	79"(2019mm)	119"(3028mm)	159"(4037mm)	199" (5047mm)