




# FIXED PIPE CLAMP THERMOCOUPLES

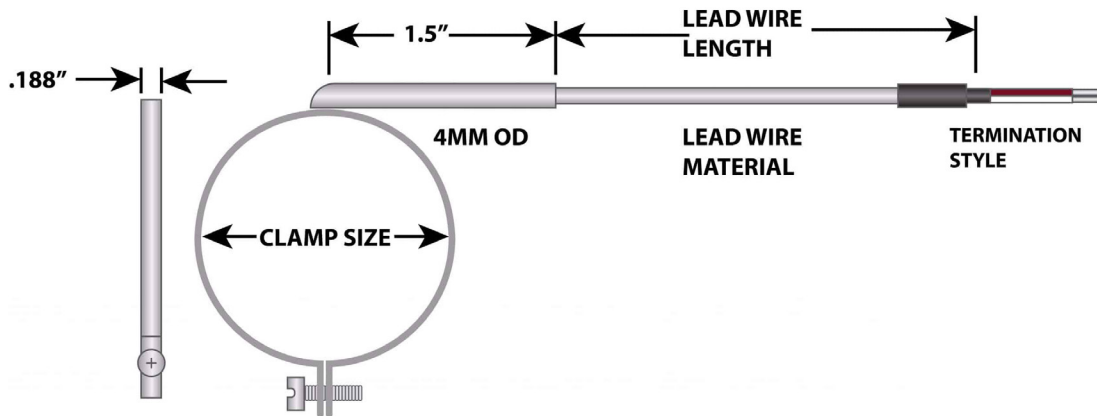

## CALIBRATION

Type J                      Type E  
 Type K  
 Type T

## LEAD LENGTH (SPECIFY)

Length:

Units:

## LEAD WIRE MATERIAL

Fiberglass (800°F)	(400°F)
Teflon (400°F)	Fiberglass with armor cable
Kapton (500°F)	(800°F) (standard)
High temperature fiberglass	Teflon with armor cable (400°F)
(1200°F)	Fiberglass with stainless steel
Fiberglass with stainless steel	braid with armor cable (800°F)
braid (800°F)	Teflon with stainless steel braid
Teflon with stainless steel braid	with armor cable (400°F)

## JUNCTION

Grounded  
 Ungrounded  
 Grounded (Dual Sensor)  
 Ungrounded (Dual Sensor)

## CLAMP SIZE

16mm  
 30mm  
 40mm  
 50mm  
 60mm  
 70mm  
 Custom – Specify in Message

## TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

## SPECIAL FEATURES

None  
 Solid conductor (Lead wire)  
 Cable Clamp  
 Bx Connector  
 Mating connector  
 Moisture protection boot on connector  
 Add ground wire to TC & RTD

## REQUIRED LEAD TIME

1.5-2 weeks (standard)  
 1 week expedited mfg  
 3-4 days expedited mfg  
 1-2 days expedite mfg  
 Same day expedited mfg