


INFORMATION

- General purpose, dry locations.
- NOT APPROVED For Hazardous Locations.
- Tinned copper braid for general purpose use.
- 4, 8 or 12 watts per foot.
- 120 through 480 volt options
- Tinned copper braid for general purpose area use.
- Circuit load: 0.033 amps per foot
- Maximum circuit length: 350 foot
- Maintains temp to 320°F

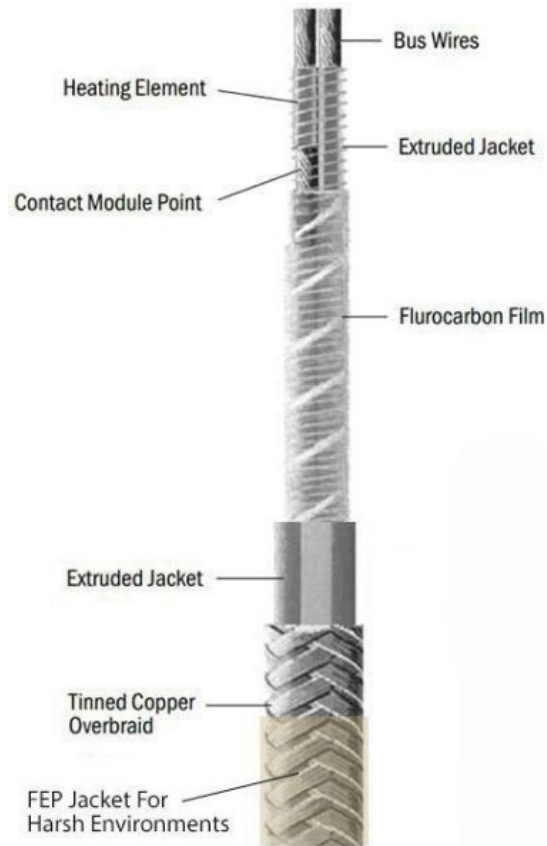

Our general purpose, constant wattage heating cable is a proven, reliable solution for industrial process temperature maintenance and freeze protection. A parallel heating core produces uniform thermal output over its entire length. Using a single power point, you can easily configure and install a heat tracing system as short as several feet or as long as 780 feet right in the field.

SPECIFICATIONS

- Uniform Thermal Output, Low Energy Cost
- No Inrush at Any Ambient
- Maximum Exposure Temperature, Power Off, 392°F (200°C)
- Steam Cleanable on Process Equipment Up to 190 PSIG (Power Off)
- Approximate Size 1/4"W x 1/8"H
- Minimum Bend Radius 1-1/4"
- For Use on Metallic Pipes

WARNING — A ground fault protection device is required by NEC to minimize the danger of fire if the heating cable is damaged or improperly installed. A minimum trip level of 30mA is recommended to minimize nuisance tripping.

MAX LENGTH

Output	Voltage	Circuit Load	Max.Circuit Length
4 W/Ft.	120 volt	0.033 Amps/Ft.	350 Ft.
8 W/Ft.	120 volt	0.067 Amps/Ft.	240 Ft.
12 W/Ft.	120 volt	0.100 Amps/Ft.	200 Ft.
4 W/Ft.	240 volt	0.017 Amps/Ft.	700 Ft.
8 W/Ft.	240 volt	0.033 Amps/Ft.	480 Ft.
12 W/Ft.	240 volt	0.050 Amps/Ft.	400 Ft.
12 W/Ft.	480 volt	0.025 Amps/Ft.	780 Ft.