




# NEWBURY NOZZLE THERMOCOUPLES

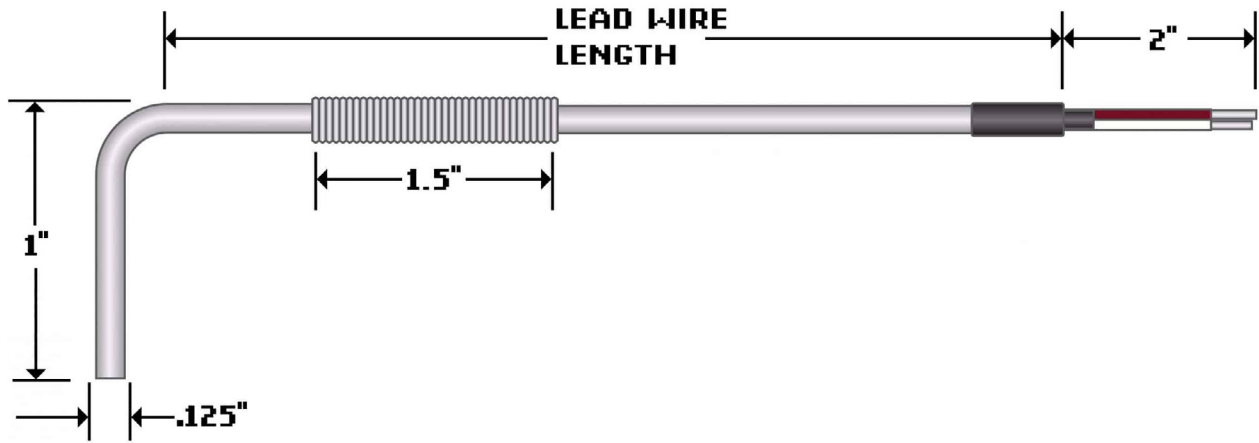

## CALIBRATION

Type J

## LEAD WIRE MATERIAL ( UNDER COATING)

Fiberglass with stainless steel braid (800°F)

## INSERTION LENGTH

Length:

Units:

## TERMINATIONS/OPTIONS

Stripped Leads

Other (specify in message)

## LEAD WIRE LENGTH

Length:

Units:

## SPECIAL FEATURES

None

Solid conductor (Lead wire)

Cable Clamp

Bx Connector

Moisture protection boot on connector

Add ground wire to TC & RTD

Silver solder thermocouple junction

## SHEATH DIAMETER

0.125" (3.2mm) (1/8")

Other – Specify in Message

## SHEATH CONFIGURATION

90 Degree Bend

## JUNCTION

Grounded (standard)

## REQUIRED LEAD TIME

1.5-2 weeks (standard)

1 week expedited mfg

3-4 days expedited mfg

1-2 days expedite mfg

Same day expedited mfg