




TEFLON COATED THERMOCOUPLES

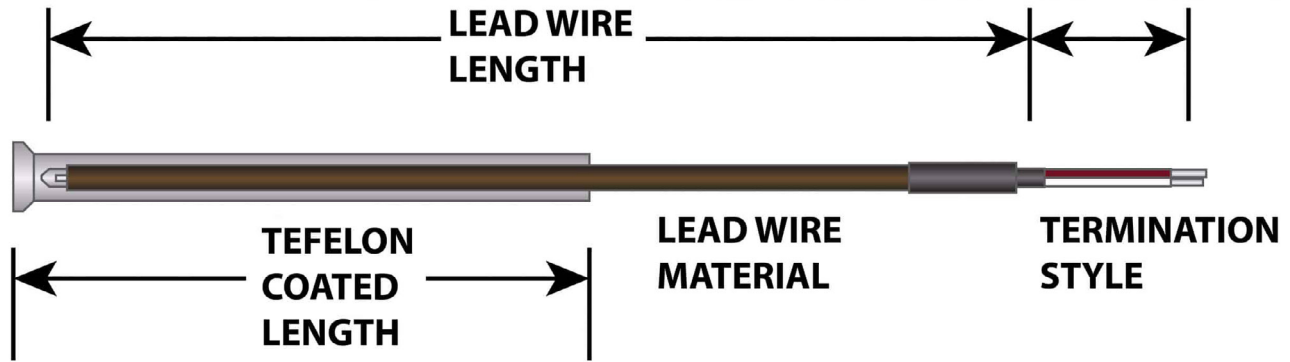

CALIBRATION

Type J Type E
 Type K
 Type T

LEAD WIRE MATERIAL (UNDER COATING)

Fiberglass (800°F)
 Teflon (400°F)
 Kapton (500°F)
 Fiberglass with stainless steel braid (800°F)
 Teflon with stainless steel braid (400°F)

LEAD LENGTH (SPECIFY)

Length:

Units:

TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

TEFLON COATING

0.032" wall thickness (Thick wall)
 0.010 wall thickness (Thin wall)

TEFLON COATED LENGTH

Length:

Units:

SPECIAL FEATURES

None	Bx Connector
Solid conductor (Lead wire)	Mating connector
Flat tip probe	Moisture protection boot on connector
Drill point tip	Add ground wire to TC & RTD
Epoxy seal	Silver solder thermocouple junction
Cable Clamp	

REQUIRED LEAD TIME

1.5-2 weeks (standard)
 1 week expedited mfg
 3-4 days expedited mfg
 1-2 days expedite mfg
 Same day expedited mfg