




# BRASS BRACKET RTD'S

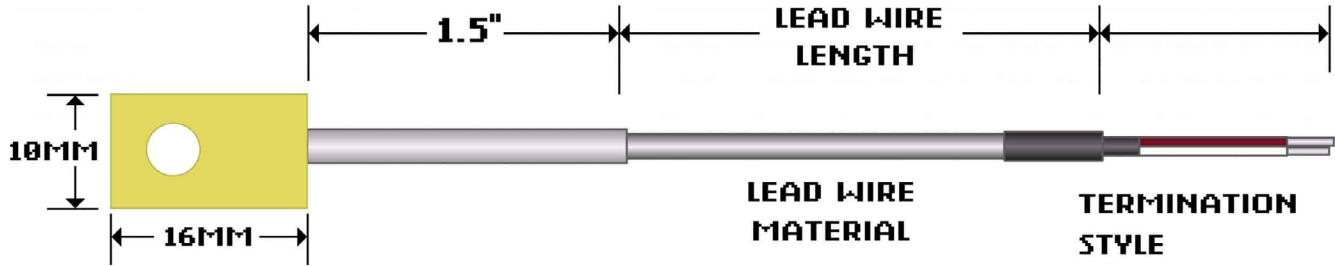

## ELEMENT TYPE

- 100 Ω     500 Ω     10 Ω  
 1000 Ω     120 Ω

## WIRE CONFIGURATION

- 2-wire     4-wire     3-wire  
 3-wire     2-wire (Dual) (Dual)

## LEAD LENGTH (SPECIFY)

Length:

Units:

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)  
 1 week expedited mfg  
 3-4 days expedited mfg  
 1-2 days expedite mfg  
 Same day expedited mfg

## BRACKET TYPE

- Straight brass mounting bracket (10MM wide x 16MM long)  
 Straight brass mounting bracket (0.75" x 1.25" long)  
 90 degree brass mounting bracket (10MM wide x 16MM long)  
 Custom

## LEAD WIRE MATERIAL

- Fiberglass (800°F)  
 Teflon (400°F)  
 Fiberglass with stainless steel braid (800°F)  
 Teflon with stainless steel braid (400°F)  
 Fiberglass with armor cable (800°F)  
 Teflon with armor cable (400°F)  
 Fiberglass with stainless steel braid (800°F) w/ armor cable  
 Teflon with Stainless steel braid (400°F) w/ armor cable

## TERMINATIONS/OPTIONS

- Stripped Leads     Standard female jack (400°F)  
 Fork Terminals     Miniature male plug (400°F)  
 Standard male plug (400°F)     Miniature female jack (400°F)

## SPECIAL FEATURES

- None  
 Epoxy seal  
 Cable Clamp  
 Bx Connector  
 Mating connector  
 Moisture protection boot on connector