




# HEAD & GROOVE RTD'S

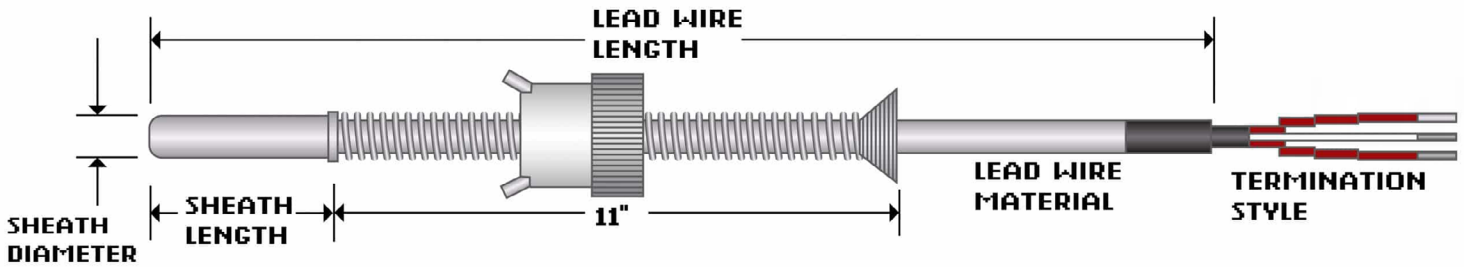

## ELEMENT TYPE

- 100 Ω
- 120 Ω
- 1000 Ω
- 10 Ω
- 500 Ω

## WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire
- 2-wire (Dual)
- (Dual)

## SHEATH LENGTH

- 1/4"
- 5/8"
- 3/8 (standard)"
- 3/4"
- 1/2"
- 1"

## CAP STYLE

- 12MM OD Double eared cap

## LEAD LENGTH (SPECIFY)

Length:

Units:

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## THREADED ADAPTER

- 1/4" BSP threaded fitting (Mates with 12MM Double eared cap)
- No Fitting

## SHEATH DIAMETER

- 0.188" (4.8mm) (3/16") (standard)
- 0.314" (8mm) (5/16")
- 0.236" (6mm)
- Custom
- 0.250" (6.4mm) (1/4")

## LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

## TERMINATIONS/OPTIONS

- Stripped Leads
- Standard female jack (400°F)
- Fork Terminals
- Miniature male plug (400°F)
- Standard male plug (400°F)
- Miniature female jack (400°F)

## SPECIAL FEATURES

- None
- Cable Clamp
- Flat tip probe
- Bx Connector
- Drill point tip
- Mating connector
- Epoxy seal
- Moisture protection boot on connector