





Strap it to a pipe with a pipe clamp!





FM & FMC
CERTIFICATION



ATEX
CERTIFICATION



4-1/4"

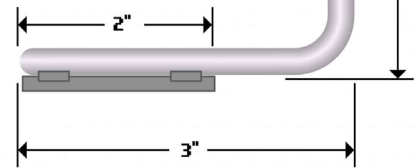

ELEMENT TYPE

- 100 Ω Mineral Insulated 500degC
- 100 Ω Mineral Insulated 800degC

WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire
- 2-wire (Dual)
- (Dual)

SHEATH CONFIGURATION

- 3" X 4.25" (90° Bend)

TRANSMITTER

- None
- 4-20mA Transmitter (non-insolated)
- 4-20mA Transmitter (Isolated)

CONNECTION HEAD STYLE



Large Cast Aluminum



Cast Aluminum Explosion Proof



FDA Compliant Plastic



Plastic Head



Epoxy Coated Aluminum



Cast Iron



FDA Compliant Flip-Flop

TRANSMITTER RANGE

Range:

Temp Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

SHEATH DIAMETER

- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.196" (5mm)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- 0.375" (9.5mm) (3/8")
- Custom

HEAD MOUNTING FITTING (FITTINGS SILVER SOLDERED (BRAZED) TO SHEATH)

- 1/2"npt single thread bushing (no process thread)