




# INSERTION TYPE THERMOCOUPLES

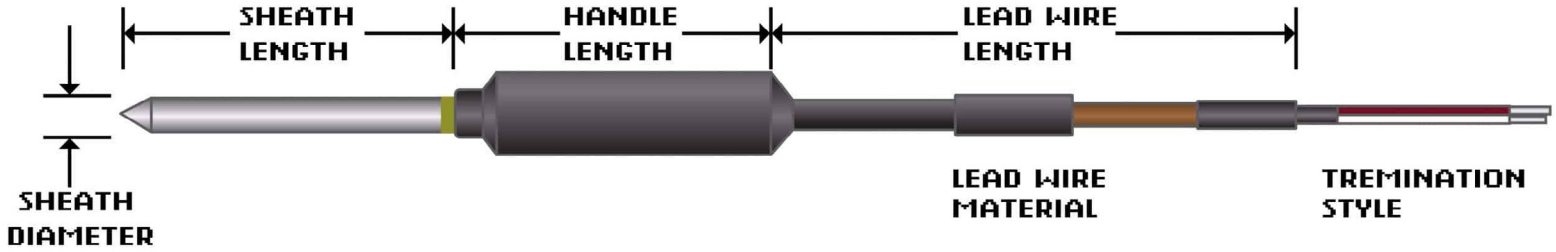

## CALIBRATION

Type J	Type T
Type K	Type E

## SHEATH DIAMETER

0.165"	0.197"	Custom
--------	--------	--------

## SHEATH LENGTH (SPECIFY)

Length:

Units:

## JUNCTION

- Grounded
- Ungrounded

## HANDLE OPTIONS

- 3/8" diameter X 3" Long
- 1/2" diameter X 5" Long
- Custom

## SPECIAL FEATURES

- None
- Solid conductor (Lead wire)
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## LEAD WIRE MATERIAL

Fiberglass (800°F)	Fiberglass with armor cable (800°F) (standard)
Teflon (400°F)	Teflon with armor cable (400°F)
Kapton (500°F)	Kapton with armor cable (500°F)
High temperature fiberglass (1200°F)	High temperature fiberglass with armor cable (1200°F)
Fiberglass with stainless steel braid	Fiberglass with stainless steel braid with armor cable (800°F)
Teflon with stainless steel braid (400°F)	Teflon with stainless steel braid with armor cable (400°F)

## LEAD LENGTH (SPECIFY)

Length:

Units:

## TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	