




# L-SHAPED METAL HEATER

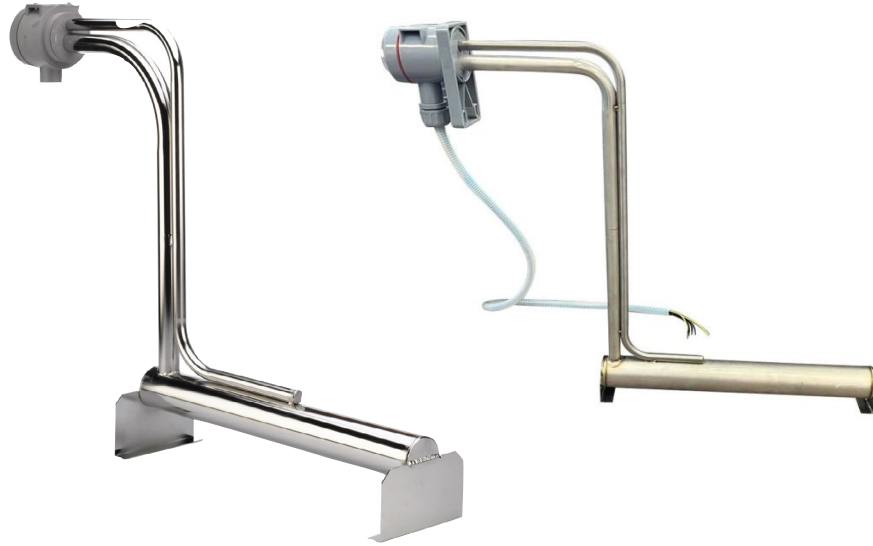

## INFORMATION

- DURABLE AND EFFICIENT CHEMICAL HEATER
- BOTTOM STYLE, L-SHAPED DESIGN
- HEAVY WALL METAL SHEATHS AVAILABLE IN STEEL, 304 STAINLESS STEEL, 316 STAINLESS STEEL, AND TITANIUM (CHECK WITH CHEMICAL SUPPLIER FOR PROPER MATERIAL SELECTION)
- THREE PHASE
- 3000-36000 WATTS, 240-480 VOLTS

## FEATURES

- HEAVY WALL METAL SHEATHS AVAILABLE IN STEEL, 304 STAINLESS STEEL, 316 STAINLESS STEEL, AND TITANIUM
- WATT DENSITIES OF UP TO 35 WATTS/SQUARE INCH (5.4 W/CM<sup>2</sup>)
- VAPOR RESISTANT AND FLAME RETARDANT TERMINAL ENCLOSURE MADE OF POLYPROPYLENE, WITH 3 FT (.9M) FLEXIBLE PVC LIQUID TIGHT CONDUIT
- GROUNDED CONSTRUCTION AND BUILT-IN THERMAL PROTECTOR
- REPLACEABLE P1 PROTECTOR STANDARD FOR SOLUTIONS UP TO 180°F(82°C)

## THERMAL PROTECTOR / FUSES

- REPLACEABLE P1: STANDARD FOR SOLUTIONS UP TO 180°F (82°C)
- REPLACEABLE P4: FOR SOLUTIONS FROM 180 TO 220°F (82 TO 105°C)
- RESETTABLE P2: FOR SOLUTIONS UP TO 180°F (82°C)
- RESETTABLE P6: FOR SOLUTIONS FROM 180 TO 220°F (82 TO 105°C)

## STANDARD PRODUCTS

MPI P/N	Material	Watts (W)	Volts (V)	Horizontal Length	Vertical Length
IM-3LP3213-R*-**	Steel	3000 W	240 V	13 "330 mm	15 "381 mm
IM-3LP3413-R*-**	Steel	3000 W	480 V	13 "330 mm	15 "381 mm
IM-3LP6217-R*-**	Steel	6000 W	240 V	17 "432 mm	37 "940 mm
IM-3LP6417-R*-**	Steel	6000 W	480 V	17 "432 mm	37 "940 mm
IM-3LP9222-R*-**	Steel	9000 W	240 V	22 "559 mm	37 "940 mm
IM-3LP9422-R*-**	Steel	9000 W	480 V	22 "559 mm	37 "940 mm
IM-3LP12226-R*-**	Steel	12,000 W	240 V	26 "660 mm	37 "940 mm
IM-3LP12426-R*-**	Steel	12,000 W	480 V	26 "660 mm	37 "940 mm
IM-3LP15231-R*-**	Steel	15000 W	240 V	31 "787 mm	37 "940 mm
IM-3LP15431-R*-**	Steel	15000 W	480 V	31 "787 mm	37 "940 mm
IM-3LP18236-R*-**	Steel	18,000 W	240 V	36 "914 mm	50 "1270 mm
IM-3LP18436-R*-**	Steel	18,000 W	480 V	36 "914 mm	50 "1270 mm
IM-3LP24244-R*-**	Steel	24,000 W	240 V	44 "1118 mm	50 "1270 mm
IM-3LP24444-R*-**	Steel	24,000 W	480 V	44 "1118 mm	50 "1270 mm
IM-3LP27450-R*-**	Steel	27000 W	480 V	50 "1270 mm	50 "1270 mm
IM-3LP30455-R*-**	Steel	30,000 W	480 V	55 "1397 mm	50 "1270 mm
IM-3LP36464-R*-**	Steel	36,000 W	480 V	64 "1626 mm	50 "1270 mm
IM-3LF3213-R*-**	304 Stainless Steel	3000 W	240 V	13 "330 mm	15 "381 mm
IM-3LF3413-R*-**	304 Stainless Steel	3000 W	480 V	13 "330 mm	15 "381 mm
IM-3LF6217-R*-**	304 Stainless Steel	6000 W	240 V	17 "432 mm	37 "940 mm
IM-3LF6417-R*-**	304 Stainless Steel	6000 W	480 V	17 "432 mm	37 "940 mm
IM-3LF9222-R*-**	304 Stainless Steel	9000 W	240 V	22 "559 mm	37 "940 mm
IM-3LF9422-R*-**	304 Stainless Steel	9000 W	480 V	22 "559 mm	37 "940 mm
IM-3LF12226-R*-**	304 Stainless Steel	12,000 W	240 V	26 "660 mm	37 "940 mm
IM-3LF12426-R*-**	304 Stainless Steel	12,000 W	480 V	26 "660 mm	37 "940 mm
IM-3LF15231-R*-**	304 Stainless Steel	15000 W	240 V	31 "787 mm	37 "940 mm

MPI P/N	Material	Watts (W)	Volts (V)	Horizontal Length	Vertical Length
IM-3LF15431-R*-**	304 Stainless Steel	15000 W	480 V	31 "787 mm	37 "940 mm
IM-3LF18236-R*-**	304 Stainless Steel	18,000 W	240 V	36 "914 mm	50 "1270 mm
IM-3LF18436-R*-**	304 Stainless Steel	18,000 W	480 V	36 "914 mm	50 "1270 mm
IM-3LF24244-R*-**	304 Stainless Steel	24,000 W	240 V	44 "1118 mm	50 "1270 mm
IM-3LF24444-R*-**	304 Stainless Steel	24,000 W	480 V	44 "1118 mm	50 "1270 mm
IM-3LF27450-R*-**	304 Stainless Steel	27000 W	480 V	50 "1270 mm	50 "1270 mm
IM-3LF30455-R*-**	304 Stainless Steel	30,000 W	480 V	55 "1397 mm	50 "1270 mm
IM-3LF36464-R*-**	304 Stainless Steel	36,000 W	480 V	64 "1626 mm	50 "1270 mm
IM-3LS3213-R*-**	316 Stainless Steel	3000 W	240 V	13 "330 mm	15 "381 mm
IM-3LS3413-R*-**	316 Stainless Steel	3000 W	480 V	13 "330 mm	15 "381 mm
IM-3LS6217-R*-**	316 Stainless Steel	6000 W	240 V	17 "432 mm	37 "940 mm
IM-3LS6417-R*-**	316 Stainless Steel	6000 W	480 V	17 "432 mm	37 "940 mm
IM-3LS9222-R*-**	316 Stainless Steel	9000 W	240 V	22 "559 mm	37 "940 mm
IM-3LS9422-R*-**	316 Stainless Steel	9000 W	480 V	22 "559 mm	37 "940 mm
IM-3LS12226-R*-**	316 Stainless Steel	12,000 W	240 V	26 "660 mm	37 "940 mm
IM-3LS12426-R*-**	316 Stainless Steel	12,000 W	480 V	26 "660 mm	37 "940 mm
IM-3LS15231-R*-**	316 Stainless Steel	15000 W	240 V	31 "787 mm	37 "940 mm
IM-3LS15431-R*-**	316 Stainless Steel	15000 W	480 V	31 "787 mm	37 "940 mm
IM-3LS18236-R*-**	316 Stainless Steel	18,000 W	240 V	36 "914 mm	50 "1270 mm
IM-3LS18436-R*-**	316 Stainless Steel	18,000 W	480 V	36 "914 mm	50 "1270 mm
IM-3LS24244-R*-**	316 Stainless Steel	24,000 W	240 V	44 "1118 mm	50 "1270 mm
IM-3LS24444-R*-**	316 Stainless Steel	24,000 W	480 V	44 "1118 mm	50 "1270 mm
IM-3LS27450-R*-**	316 Stainless Steel	27000 W	480 V	50 "1270 mm	50 "1270 mm
IM-3LS30455-R*-**	316 Stainless Steel	30,000 W	480 V	55 "1397 mm	50 "1270 mm
IM-3LS36464-R*-**	316 Stainless Steel	36,000 W	480 V	64 "1626 mm	50 "1270 mm
IM-3LT3213-R*-**	Titanium	3000 W	240 V	13 "330 mm	15 "381 mm
IM-3LT3413-R*-**	Titanium	3000 W	480 V	13 "330 mm	15 "381 mm
IM-3LT6217-R*-**	Titanium	6000 W	240 V	17 "432 mm	37 "940 mm

MPI P/N	Material	Watts (W)	Volts (V)	Horizontal Length	Vertical Length
IM-3LT6417-R*-**	Titanium	6000 W	480 V	17 "432 mm	37 "940 mm
IM-3LT9222-R*-**	Titanium	9000 W	240 V	22 "559 mm	37 "940 mm
IM-3LT9422-R*-**	Titanium	9000 W	480 V	22 "559 mm	37 "940 mm
IM-3LT12226-R*-**	Titanium	12,000 W	240 V	26 "660 mm	37 "940 mm
IM-3LT12426-R*-**	Titanium	12,000 W	480 V	26 "660 mm	37 "940 mm
IM-3LT15231-R*-**	Titanium	15000 W	240 V	31 "787 mm	37 "940 mm
IM-3LT15431-R*-**	Titanium	15000 W	480 V	31 "787 mm	37 "940 mm
IM-3LT18236-R*-**	Titanium	18,000 W	240 V	36 "914 mm	50 "1270 mm
IM-3LT18436-R*-**	Titanium	18,000 W	480 V	36 "914 mm	50 "1270 mm
IM-3LT24244-R*-**	Titanium	24,000 W	240 V	44 "1118 mm	50 "1270 mm
IM-3LT24444-R*-**	Titanium	24,000 W	480 V	44 "1118 mm	50 "1270 mm
IM-3LT27450-R*-**	Titanium	27000 W	480 V	50 "1270 mm	50 "1270 mm
IM-3LT30455-R*-**	Titanium	30,000 W	480 V	55 "1397 mm	50 "1270 mm
IM-3LT36464-R*-**	Titanium	36,000 W	480 V	64 "1626 mm	50 "1270 mm