




NIPPLE UNION WITH CONNECTION HEAD TYPE RTD

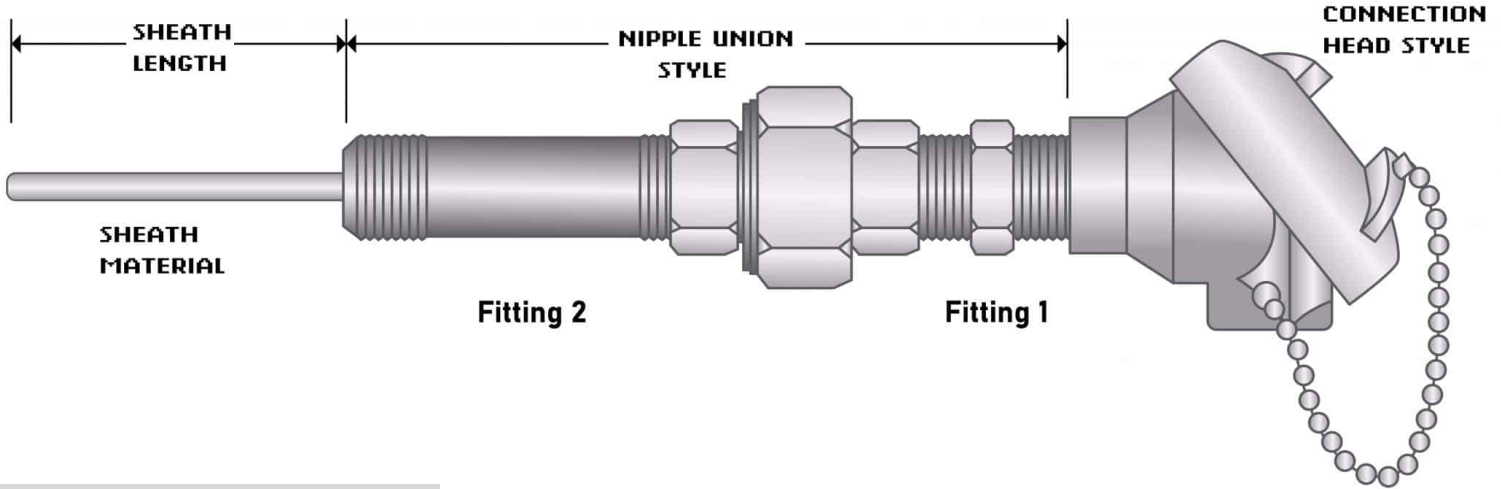

ELEMENT TYPE

- 100 Ω
- 120 Ω
- 1000 Ω
- 10 Ω
- 500 Ω

WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire
- 2-wire (Dual)
- (Dual)

SHEATH LENGTH

Length:

Units:

TRANSMITTER

- None
- 4-20mA Transmitter (non-insolated)
- 4-20mA Transmitter (Isolated)

TRANSMITTER RANGE

Range:

Temp Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

CONNECTION HEAD STYLE



SHEATH DIAMETER

- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.196" (5mm)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- 0.375" (9.5mm) (3/8")
- Custom

NIPPLE UNION STYLE FITTING 1

- 1/2"NPT x 1/2"NPT double thread
- 1/2"NPT x 3/4"NPT double thread
- 1/2"NPT x 1/2"NPT double thread (with internal compression fitting)
- 1/2"NPT x 1/2"NPT double thread spring loaded w/oil seal

NIPPLE UNION STYLE FITTING 2

- 1/2"NPT x 1/2"NPT double thread
- 3/4"NPT Pipe 3" long
- 3/4"NPTx 3/4"NPT double thread
- 3/4"NPT Pipe 4" long
- 1/2"NPT Pipe 3" long
- No Fitting
- 1/2"NPT Pipe 4" long