




ADJUSTABLE BAYONET ARMOR W/ POSITIVE INDICATING CAP

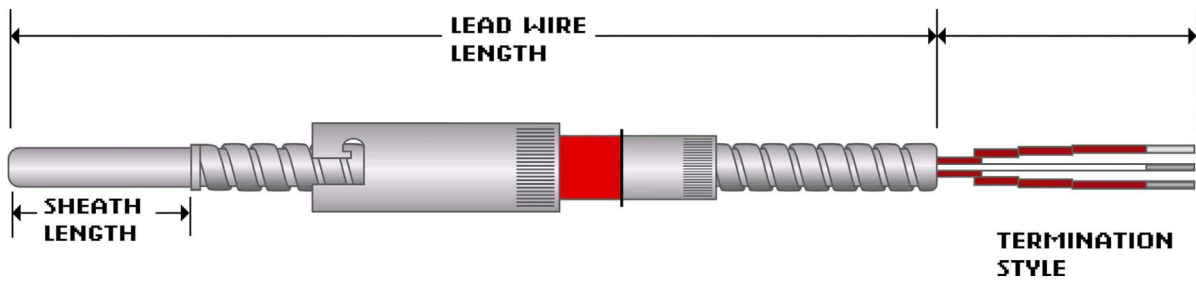

NAME: _____

CALIBRATION

Type J	Type E
Type K	
Type T	

ARMOR CABLE DIAMETER /

0.210"OD/ Positive indicating bayonet cap w/ Red indicator
0.210"OD/ Positive indicating bayonet cap w/ Green indicator
0.275"OD/ Positive indicating bayonet cap w/ Red indicator

SHEATH LENGTH

1/4"	1"
3/8" (Standard)	1.25"
1/2"	1.5"
5/8"	1.75"
Y 3/4"	2"

SHEATH DIAMETER

0.118" (3mm)	0.236" (6mm)
0.125" (3.2mm) (1/8")	0.250" (6.4mm) (1/4")
0.156" (4mm)	0.314" (8mm) (5/16")
0.188" (4.8mm) (3/16") (standard)	Custom – Specify in Message

LEAD LENGTH (SPECIFY)

Length: _____

Units: _____

LEAD WIRE MATERIAL

Fiberglass (800°F)	Fiberglass with stainless steel braid (800°F) (standard)
Teflon (400°F)	Teflon with stainless steel v braid (400°F)
Kapton (500°F)	
High temperature fiberglass (1200°F)	

JUNCTION

- Grounded, flat tip
- Grounded, round tip
- Grounded, drill point
- Ungrounded, round tip
- Ungrounded, drill point
- Ungrounded, flat tip

TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

QUANTITY

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

SPECIAL FEATURES

None	Bx Connector
Solid conductor (Lead wire)	Mating connector
Flat tip probe	Moisture protection boot on connector
Drill point tip	Add ground wire to TC & RTD
Epoxy seal	Silver solder thermocouple junction
Cable Clamp	