




# ADJUSTABLE PIPE CLAMP THERMOCOUPLES

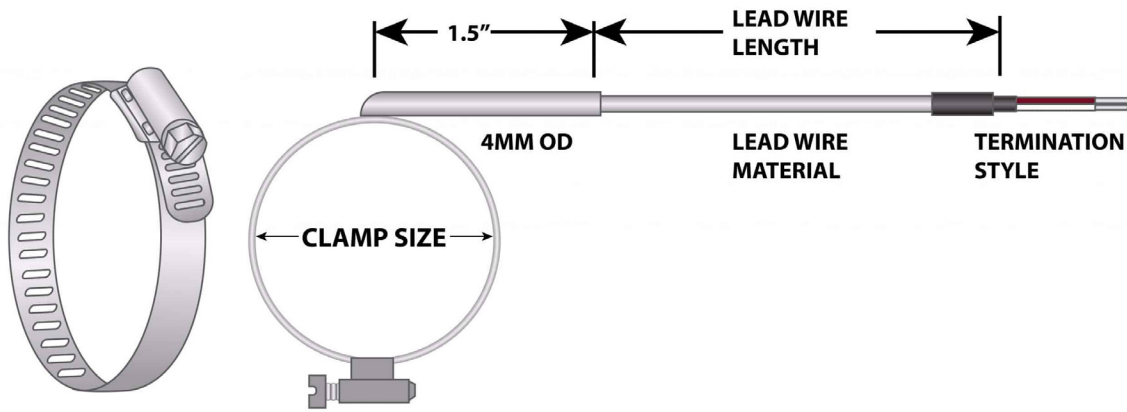

NAME:

## CALIBRATION

- Type J
- Type K
- Type T
- Type E

## LEAD LENGTH (SPECIFY)

Length:

Units:

## JUNCTION

- Grounded
- Ungrounded
- Grounded (Dual Sensor)
- Ungrounded (Dual Sensor)

## CLAMP SIZE

- 7/32" to 5/8"      1-15/16" to
- 7/16" to 25/32"    2-1/2"
- 1/2" to 29/32"     Custom –
- 11/16" to 1-1/4"   Specify in
- 15/16" to 1-1/2"   Message
- 1-7/16" to 2"
- 1-11/16" to 2-1/4"

## QUANTITY

## LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Kapton (500°F)
- High temperature fiberglass (1200°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid
- (400°F)
- Fiberglass with armor cable (800°F) (standard)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid with armor cable (800°F)
- Teflon with stainless steel braid with armor cable (400°F)

## TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)
- 1/4 inch push-on connector
- Ceramic Male Plug (1200°F)
- Ceramic Female Plug (1200°F)
- Ceramic mini Male Plug (1200°F)
- Ceramic mini Female Jack (1200°F)

## SPECIAL FEATURES

- None
- Solid conductor (Lead wire)
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector
- Add ground wire to TC & RTD

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg