




# ARBURG STYLE THERMOCOUPLES

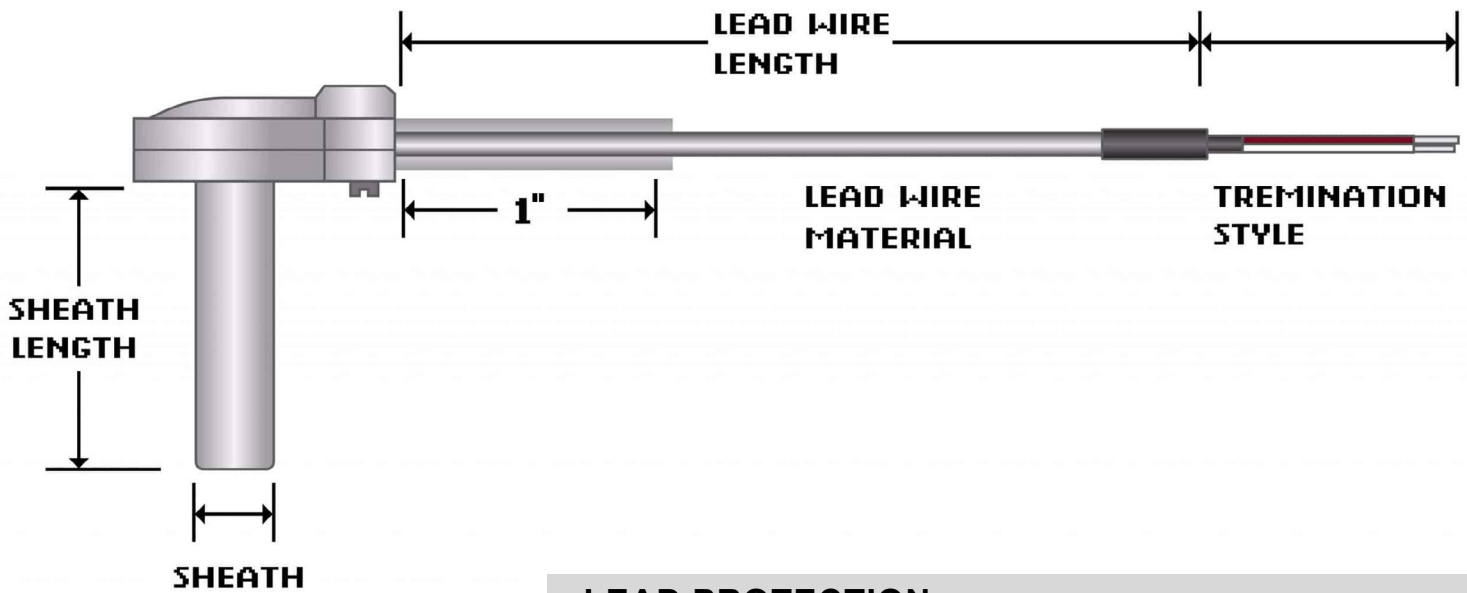

NAME:

## CALIBRATION

Type J	Type T
Type K	Type E

## CONSTRUCTION STYLE

Standard cap – 6 inch spring  
 Standard cap – 12 inch spring

## SHEATH DIAMETER

3/16 inch

## JUNCTION

Grounded, flat tip  
 Grounded, round tip  
 Grounded, drill point  
 Ungrounded, round tip  
 Ungrounded, drill point  
 Ungrounded, flat tip

## SHEATH LENGTH

1 inch

## LEAD LENGTH (IN WHOLE INCHES)

Length:

## QUANTITY

## LEAD PROTECTION

Fiberglass (24 gauge stranded)  
 Fiberglass with stainless steel overbraid (24 gauge stranded)  
 Fiberglass (20 gauge stranded)  
 Fiberglass with stainless steel overbraid (20 gauge stranded)  
 PFA (24 gauge stranded)  
 PFA with stainless steel overbraid (24 gauge stranded)  
 PFA (20 gauge stranded)  
 PFA with stainless steel overbraid (20 gauge stranded)

## TERMINATIONS/OPTIONS

Standard, 2-1/2 inch split leads	Standard female jack, quick disconnect
2-1/2 inch split leads with #6 spade lugs	Miniature male plug, quick disconnect (24 gauge wire only)
2-1/2 inch split leads with #6 spade lugs and BX connector	Miniature female jack, quick disconnect (24 gauge wire only)
Standard male plug, quick disconnect	1/4 inch push-on connector

## REQUIRED LEAD TIME

1.5-2 weeks (standard)  
 1 week expedited mfg  
 3-4 days expedited mfg  
 1-2 days expedite mfg  
 Same day expedited mfg