




# MI THERMOCOUPLES WITH COIL CORD

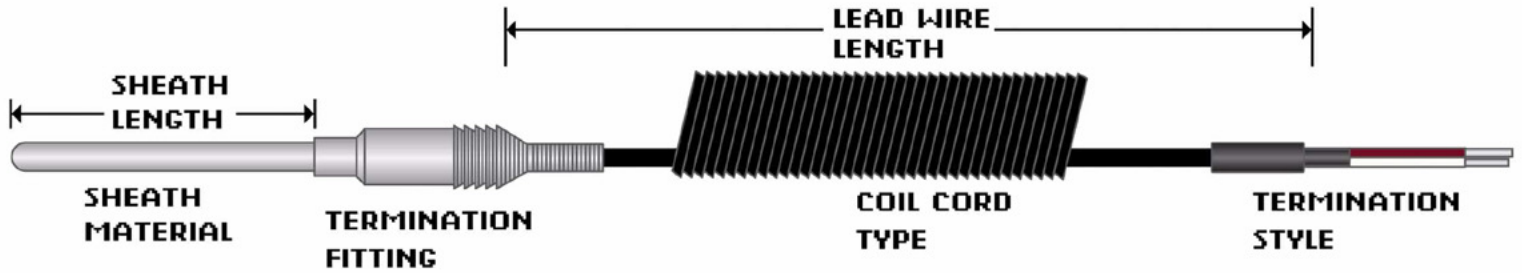

NAME:

QUANTITY

## CALIBRATION

- Type J
- Type K
- Type T
- Type E

## SHEATH LENGTH

Length:

Units:

## SHEATH MATERIAL

- 304 SS
- 316 SS
- INCONEL (600)
- 446 SS
- 310 SS
- Hastelloy

## POTTING

- Epoxy (500°F)
- Ceramic (1500°F)

## JUNCTION

- Grounded
- Ungrounded
- Exposed

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

## SHEATH DIAMETER

- 0.062" (1.6mm)(1/16")
- 0.079" (2mm)
- 0.092" (2.3mm)
- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.177" (4.5mm)
- 0.188" (4.8mm) (3/16")
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- 0.375" (9.5mm) (3/8")
- Custom

## TRANSITION FITTING

- 3/8"OD X 1.25" w/ strain relief spring
- 1/4"OD X 1.25" w/ strain relief spring
- 3/8"OD X 1.25" (no spring)
- 1/4"OD X 1.25" (no spring)

## COIL CORD STYLE

- 10" coil cord (extends to approx. 6ft) (220°F)
- 24" coil cord (extends to approx. 14ft) (220°F)

## SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Moisture protection boot on connector
- Mating Connector

## TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)
- 1/4 inch push-on connector
- Ceramic Male Plug (1200°F)
- Ceramic Female Jack (1200°F)
- Ceramic mini Male Plug (1200°F)
- Ceramic mini Female Jack (1200°F)