




NEWBURY NOZZLE THERMOCOUPLES

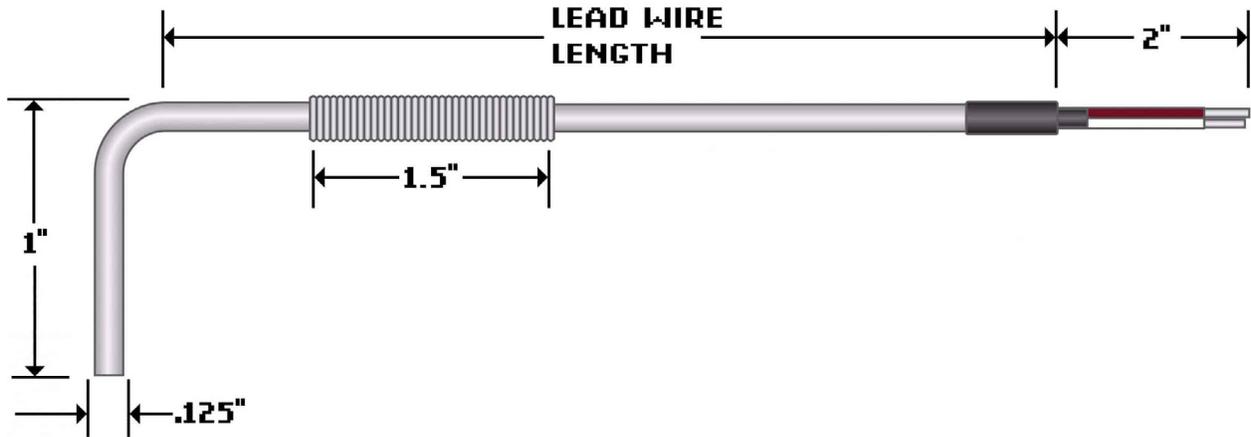

NAME:

LEAD WIRE MATERIAL (UNDER COATING)

Fiberglass with stainless steel braid (800°F)

CALIBRATION

Type J

TERMINATIONS/OPTIONS

Stripped Leads
Other (specify in message)

INSERTION LENGTH

Length:

Units:

SPECIAL FEATURES

None	Moisture protection boot on connector
Solid conductor (Lead wire)	Add ground wire to TC & RTD
Cable Clamp	Silver solder thermocouple junction
Bx Connector	

LEAD WIRE LENGTH

Length:

Units:

REQUIRED LEAD TIME

1.5-2 weeks (standard)
1 week expedited mfg
3-4 days expedited mfg
1-2 days expedite mfg
Same day expedited mfg

SHEATH DIAMETER

0.125" (3.2mm) (1/8")
Other – Specify in Message

SHEATH CONFIGURATION

90 Degree Bend

JUNCTION

Grounded (standard)

QUANTITY