




RING TERMINAL THERMOCOUPLES

**RING
TERMINAL
SIZE**

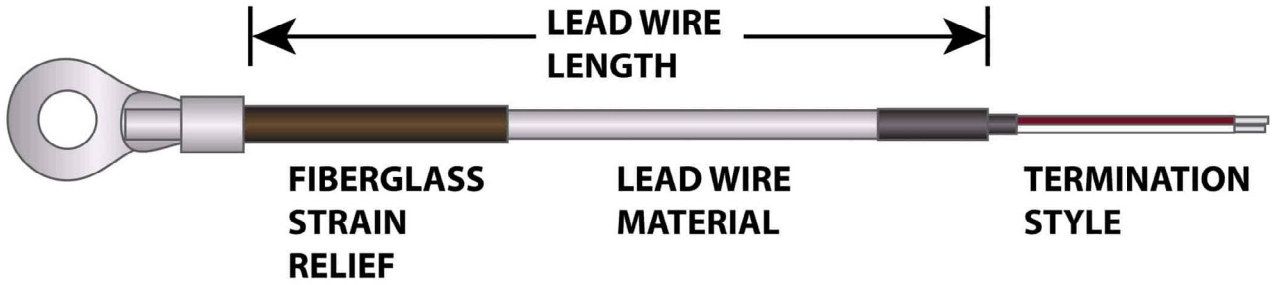

NAME:

CALIBRATION

Type J	Type E
Type K	
Type T	

RING TERMINAL

- #6 (0.147" hole size)
- #8 (0.173" hole size)
- #10 (0.198" hole size)
- 1/4" (0.263" hole size)
- 5/16" (0.336" hole size)
- 3/8" (0.393" hole size)
- 1/2" (0.515" hole size)

LEAD LENGTH (SPECIFY)

Length:

Units:

JUNCTION

- Grounded (standard)
- Exposed

QUANTITY

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

LEAD WIRE MATERIAL

Fiberglass (800°F)	(400°F)
Teflon (400°F)	Fiberglass with armor cable (800°F) (standard)
Kapton (500°F)	Teflon with armor cable (400°F)
High temperature fiberglass (1200°F)	Fiberglass with stainless steel braid with armor cable (800°F)
Fiberglass with stainless steel braid (800°F)	Teflon with stainless steel braid with armor cable (400°F)
Teflon with stainless steel braid	

TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

SPECIAL FEATURES

None	Bx Connector
Solid conductor (Lead wire)	Mating connector
Flat tip probe	Moisture protection boot on connector
Drill point tip	Add ground wire to TC & RTD
Epoxy seal	Silver solder thermocouple junction
Cable Clamp	