




# TEFLON COATED THERMOCOUPLES

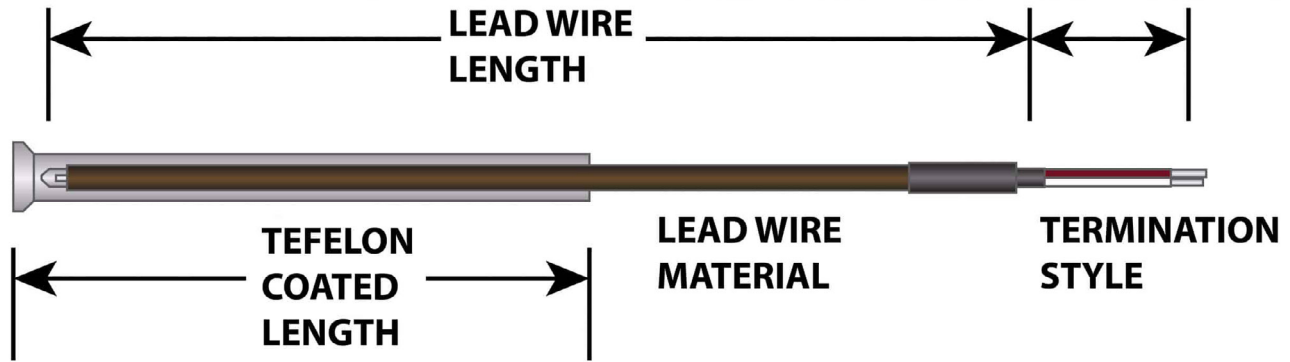

NAME:

## CALIBRATION

Type J            Type E  
 Type K  
 Type T

## LEAD WIRE MATERIAL ( UNDER COATING)

Fiberglass (800°F)  
 Teflon (400°F)  
 Kapton (500°F)  
 Fiberglass with stainless steel braid (800°F)  
 Teflon with stainless steel braid (400°F)

## LEAD LENGTH (SPECIFY)

Length:

Units:

## TERMINATIONS/OPTIONS

Stripped Leads	1/4 inch push-on connector
Fork Terminals	Ceramic Male Plug (1200°F)
Standard male plug (400°F)	Ceramic Female Plug (1200°F)
Standard female jack (400°F)	Ceramic mini Male Plug (1200°F)
Miniature male plug (400°F)	Ceramic mini Female Jack (1200°F)
Miniature female jack (400°F)	

## TEFLON COATING

0.032" wall thickness (Thick wall)  
 0.010 wall thickness (Thin wall)

## TEFLON COATED LENGTH

Length:

Units:

## SPECIAL FEATURES

None	Bx Connector
Solid conductor (Lead wire)	Mating connector
Flat tip probe	Moisture protection boot on connector
Drill point tip	Add ground wire to TC & RTD
Epoxy seal	Silver solder thermocouple junction
Cable Clamp	

## QUANTITY

## REQUIRED LEAD TIME

1.5-2 weeks (standard)  
 1 week expedited mfg  
 3-4 days expedited mfg  
 1-2 days expedite mfg  
 Same day expedited mfg