




SEMI-FINISHED THERMOCOUPLES

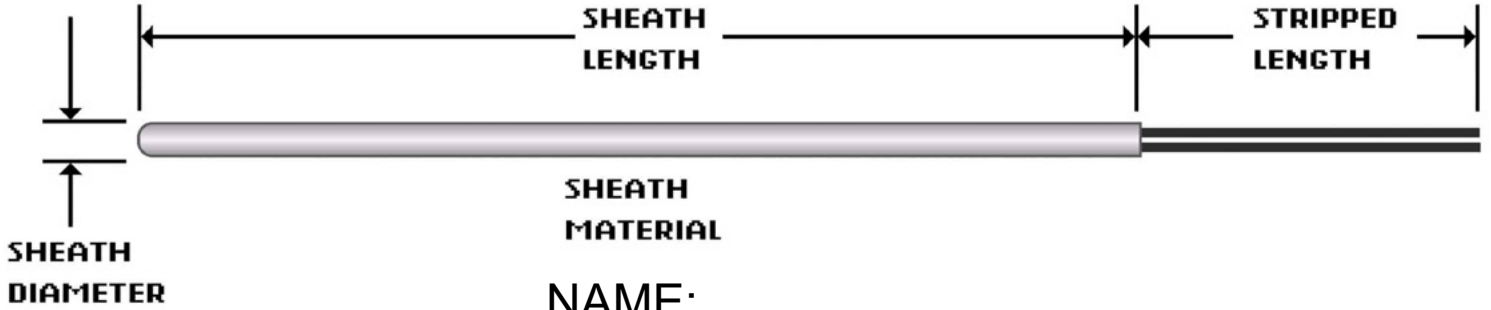

NAME:

CALIBRATION

- Type J
- Type K
- Type T
- Type E

LEAD LENGTH

Length:

Units:

SHEATH LENGTH

- 1 inch

SHEATH DIAMETER

- 3/16 inch

SHEATH MATERIAL

- 304 SS
- 316 SS
- Inconel 600

JUNCTION

- Grounded, flat tip
- Grounded, round tip
- Grounded, drill point
- Ungrounded, round tip
- Ungrounded, drill point
- Ungrounded, flat tip

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

LEAD PROTECTION

- Fiberglass (24 gauge stranded)
- Fiberglass with stainless steel overbraid (24 gauge stranded)
- Fiberglass (20 gauge stranded)
- Fiberglass with stainless steel overbraid (20 gauge stranded)
- PFA (24 gauge stranded)
- PFA with stainless steel overbraid (24 gauge stranded)
- PFA (20 gauge stranded)
- PFA with stainless steel overbraid (20 gauge stranded)

CONSTRUCTION STYLE

- Standard cap – 6 inch spring
- Standard cap – 12 inch spring

TERMINATIONS/OPTIONS

- Standard, 2-1/2 inch split leads
- 2-1/2 inch split leads with #6 spade lugs
- 2-1/2 inch split leads with #6 spade lugs and BX connector
- Standard male plug, quick disconnect
- Standard female jack, quick disconnect
- Miniature male plug, quick disconnect (24 gauge wire only)
- Miniature female jack, quick disconnect (24 gauge wire only)

QUANTITY