




THERMOCOUPLE EXTENSION CABLES

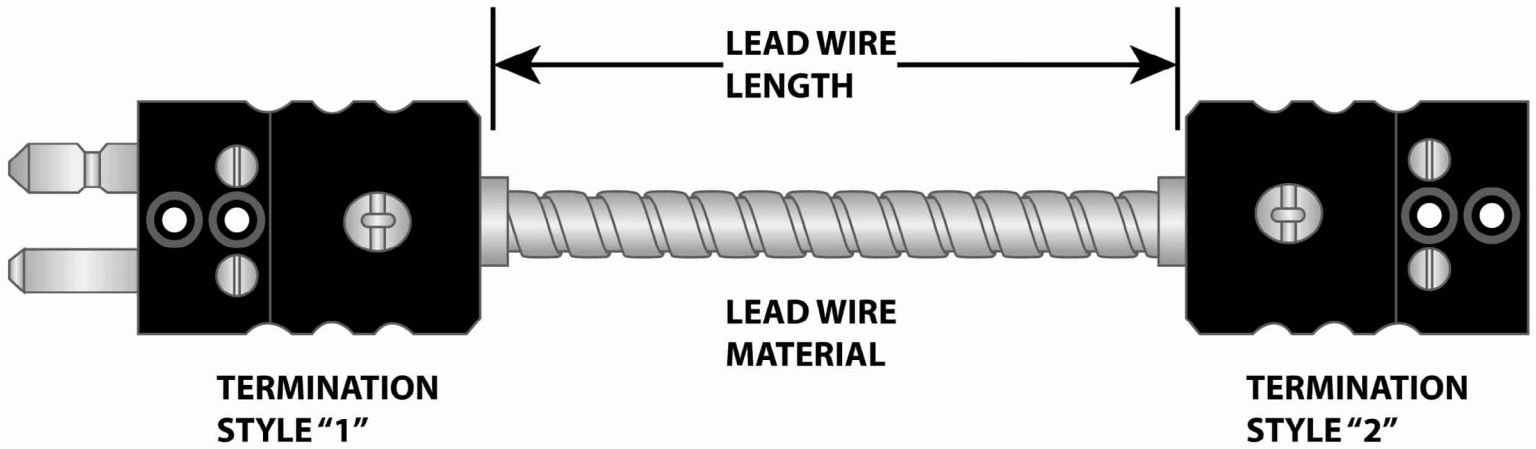

NAME:

CALIBRATION

Type J	Type J (Dual)
Type K	Type K (Dual)
Type T	Type T (Dual)
Type E	Type E (Dual)

LEAD LENGTH (SPECIFY)

Length:

Units:

SPECIAL FEATURES

- None
- Solid conductor (Lead wire)
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector

QUANTITY

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

LEAD WIRE MATERIAL

- PVC (220°F)
- Fiberglass (800°F)
- Teflon (400°F)
- Kapton (500°F)
- High temperature fiberglass (1200°F)
- Fiberglass with stainless steel braid (800°F) (Standard)
- Teflon with stainless steel braid (400°F)

- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid with armor cable (800°F)
- Teflon with stainless steel braid with armor cable (400°F)
- Ceramic fiber with Inconel weld (2100°F)

TERMINATION 1

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

- 1/4 inch push-on connector
- Ceramic Male Plug (1200°F)
- Ceramic Female Plug (1200°F)
- Ceramic mini Male Plug (1200°F)
- Ceramic mini Female Jack (1200°F)

TERMINATION 2

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

- 1/4 inch push-on connector
- Ceramic Male Plug (1200°F)
- Ceramic Female Plug (1200°F)
- Ceramic mini Male Plug (1200°F)
- Ceramic mini Female Jack (1200°F)