




ADJUSTABLE BAYONET RTD WITH FLEXIBLE ARMOR CABLE

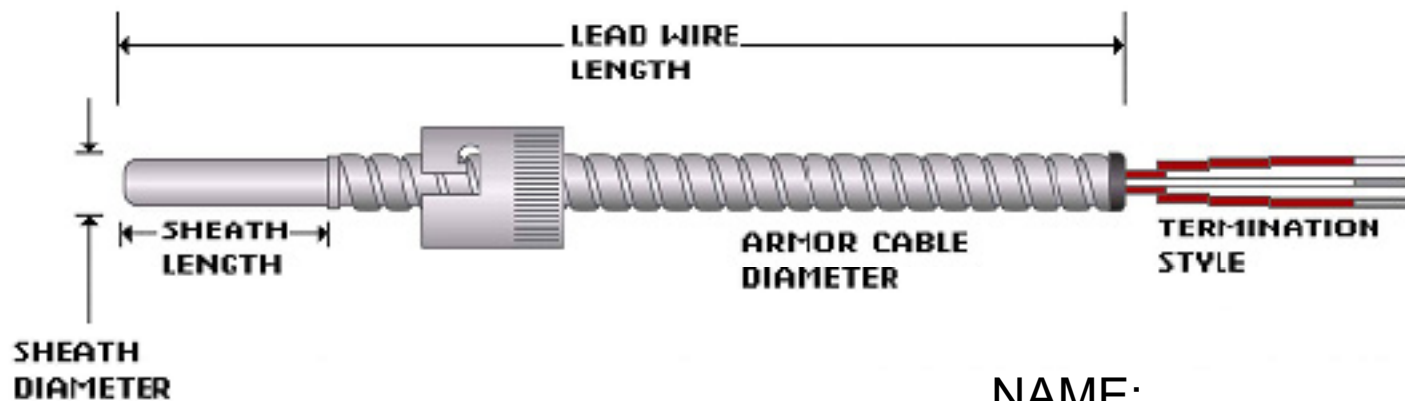

NAME:

ELEMENT TYPE

- 100 Ω 120 Ω
- 1000 Ω 10 Ω
- 500 Ω

WIRE CONFIGURATION

- 2-wire 4-wire 3-wire
- 3-wire 2-wire (Dual) (Dual)

ELEMENT TYPE

- 7/16"ID Single Slot
- 12.5mmID Double Slot
- 14.7mmID Double Slot

LEAD LENGTH

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

SHEATH LENGTH

- 1/4" 5/8" 1.25" 2"
- 3/8" (Standard) 7/4" 1.5"
- 1/2" 1" Q 1.75"

SHEATH DIAMETER

- 0.118" (3mm) 0.236" (6mm)
- 0.125" (3.2mm) (1/8") 0.250" (6.4mm) (1/4")
- 0.156" (4mm) 0.314" (8mm) (5/16")
- 0.188" (4.8mm) (3/16") (standard) Custom

LEAD WIRE MATERIAL

- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads Standard female jack (400°F)
- Fork Terminals Miniature male plug (400°F)
- Standard male plug (400°F) Miniature female jack (400°F)

SPECIAL FEATURES

- None Cable Clamp
- Flat tip probe Bx Connector
- Drill point tip Mating connector
- Epoxy seal Moisture protection boot on connector

QUANTITY