



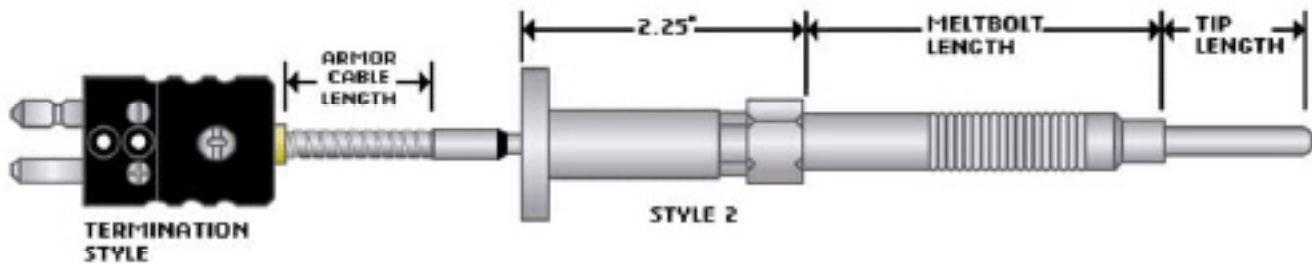

# ADJUSTABLE MELT BOLT RTD'S

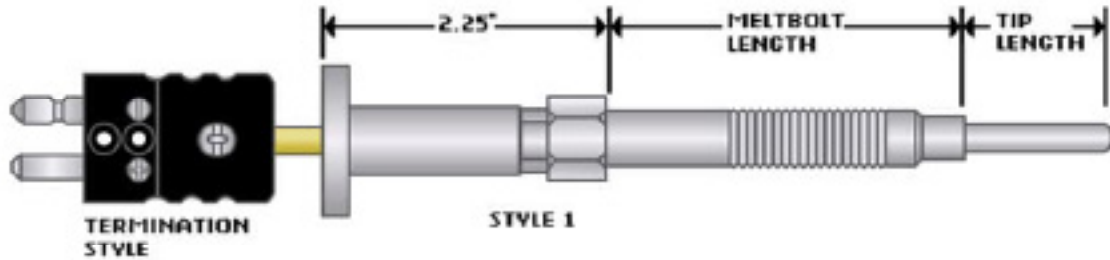

NAME:

## ELEMENT TYPE

- 100 Ω     120 Ω  
 1000 Ω     10 Ω  
 500 Ω

## WIRE CONFIGURATION

- 2-wire     4-wire     3-wire  
 3-wire     2-wire (Dual)     (Dual)

## TIP LENGTH

- Adjustable from flush to 1"  
 Adjustable from flush to 2.5"  
 Adjustable from flush to 3"  
 Custom

## MELT BOLT LENGTH

- 3"     7"     14"  
 4"     9"     Custom  
 6"     12"

## REQUIRED LEAD TIME

- 1.5-2 weeks (standard)  
 1 week expedited mfg  
 3-4 days expedited mfg  
 1-2 days expedite mfg  
 Same day expedited mfg

## TIP DIAMETER

- 0.118" (3mm)     0.236" (6mm)  
 0.125" (3.2mm) (1/8")     0.250" (6.4mm) (1/4")  
 0.156" (4mm)     0.125" with 0.188" OD support tube  
 0.188" (4.8mm) (3/16") (std)     Custom

## STYLE

- (Style 1) No Lead Wire – Rigid Style  
 (Style 2) Fiberglass with armor cable  
 (Style 3) Fiberglass with Stainless steel braid

## LEAD LENGTH (SPECIFY IF STYLE 2, 3)

Length:  Units:

## TERMINATIONS/OPTIONS

- Stripped Leads     Standard female jack (400°F)  
 Fork Terminals     Miniature male plug (400°F)  
 Standard male plug (400°F)     Miniature female jack (400°F)

## QUANTITY