




ADJUSTABLE PIPE CLAMP RTD'S

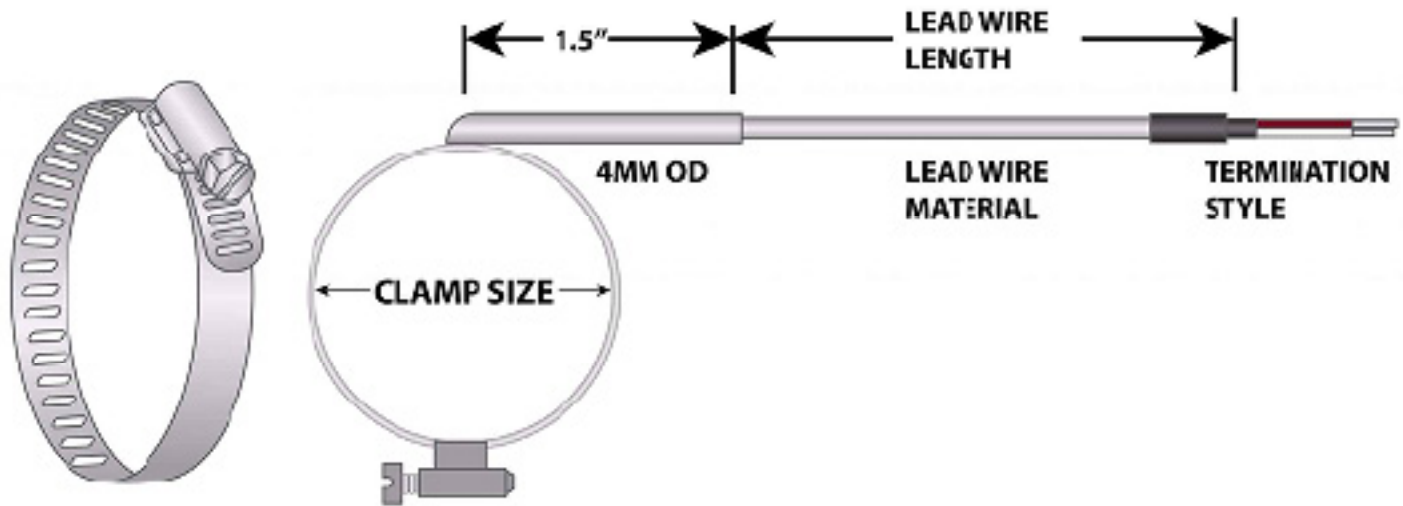

NAME:

ELEMENT TYPE

- 100 Ω
- 120 Ω
- 1000 Ω
- 10 Ω
- 500 Ω

WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire (Dual)
- 2-wire (Dual)
- (Dual)

LEAD LENGTH (SPECIFY)

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

QUANTITY

LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

CLAMP SIZE

- 7/32" to 5/8"
- 7/16" to 25/32"
- 1/2" to 29/32"
- 11/16" to 1-1/4"
- 15/16" to 1-1/2"
- 1-7/16" to 2"
- 1-11/16" to 2-1/4"
- 1-15/16" to 2-1/2"
- Custom

SPECIAL FEATURES

- None
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector