




# ADJUSTABLE BAYONET ARMOR W/ POSITING INDICATING CAP

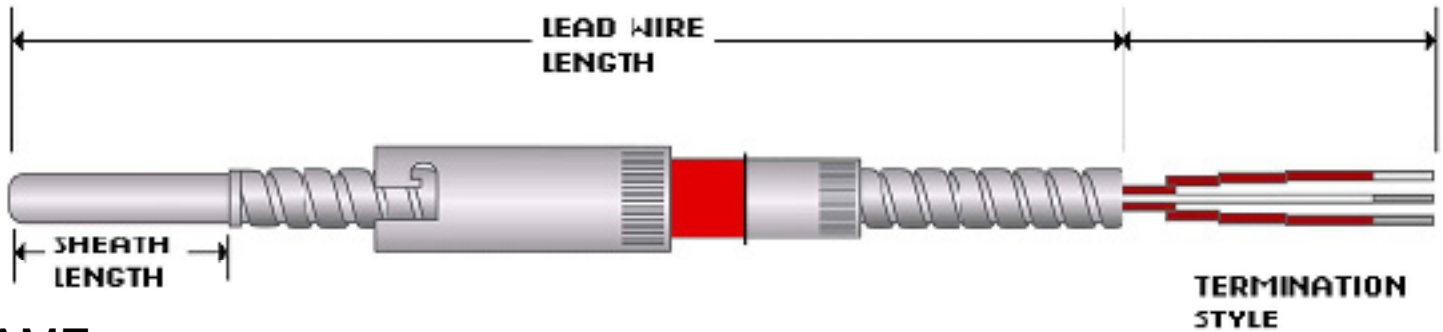

NAME:

### ELEMENT TYPE

- 100 Ω       120 Ω
- 1000 Ω     10 Ω
- 500 Ω

### WIRE CONFIGURATION

- 2-wire     4-wire     3-wire
- 3-wire     2-wire (Dual)     (Dual)

### SHEATH LENGTH

- 1/4"       1"
- 3/8" (Standard)     1.25"
- 1/2"       1.5"
- 5/8"       1.75"
- Y 3/4"     2"

### LEAD LENGTH (SPECIFY)

Length:

Units:

### REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

### ARMOR CABLE DIAMETER / CAP SIZE

- 0.210"OD/ Positive indicating bayonet cap w/ Red indicator
- 0.210"OD/ Positive indicating bayonet cap w/ Green indicator
- 0.275"OD/ Positive indicating bayonet cap w/ Red indicator

### SHEATH DIAMETER

- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- Custom

### LEAD WIRE MATERIAL

- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

### TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

### SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Cable Clamp
- Ex Connector
- Mating connector

### QUANTITY