




BEARING RTD SENSORS

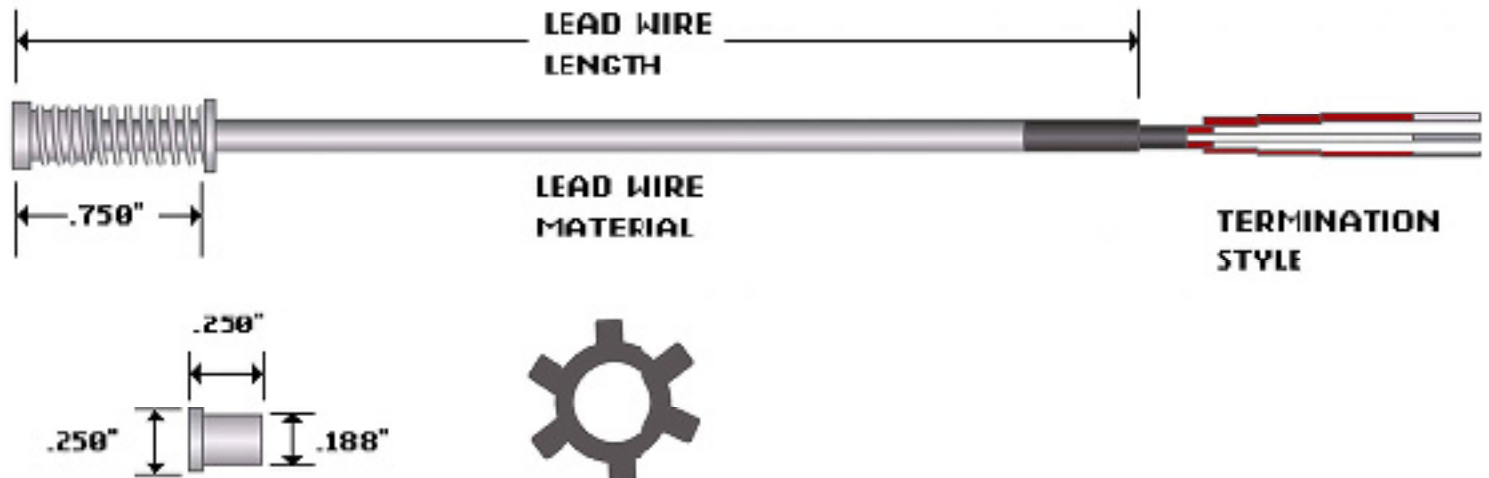

NAME:

ELEMENT TYPE

- ☐ 100 Ω ☐ 120 Ω
☐ 1000 Ω ☐ 10 Ω
☐ 500 Ω

WIRE CONFIGURATION

- ☐ 2-wire ☐ 3-wire ☐ 4-wire

LEAD LENGTH

Length:

Units:

REQUIRED LEAD TIME

- ☐ 1.5-2 weeks (standard)
☐ 1 week expedited mfg
☐ 3-4 days expedited mfg
☐ 1-2 days expedite mfg
☐ Same day expedited mfg

TIP STYLE

- ☐ 1/4" X 1/4" X 3/16" (Top Hat)

SHEATH DIAMETER

- ☐ 0.118" (3mm) ☐ 0.236" (6mm)
☐ 0.125" (3.2mm) (1/8") ☐ 0.250" (6.4mm) (1/4")
☐ 0.156" (4mm) ☐ 0.314" (8mm) (5/16")
☐ 0.188" (4.8mm) (3/16") (standard) ☐ Custom

LEAD WIRE MATERIAL

- ☐ Teflon (400°F)
☐ Teflon with stainless steel braid (400°F)
☐ Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- ☐ Stripped Leads ☐ Standard female jack (400°F)
☐ Fork Terminals ☐ Miniature male plug (400°F)
☐ Standard male plug (400°F) ☐ Miniature female jack (400°F)

QUANTITY