




BRASS BRACKET RTD'S

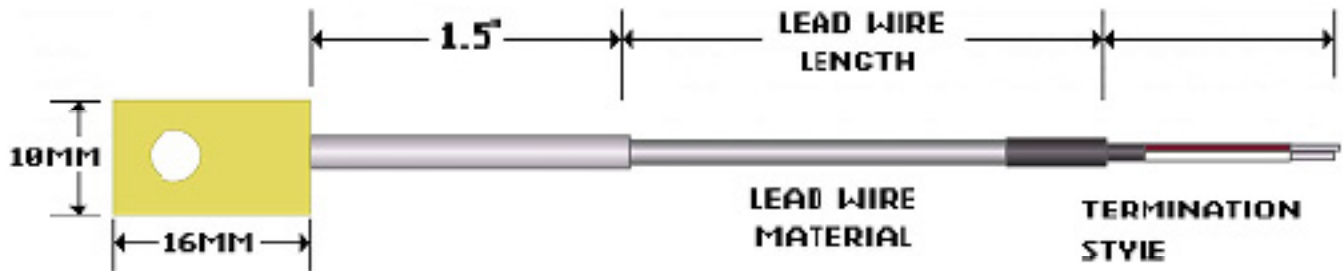

NAME:

ELEMENT TYPE

- 100 Ω 500 Ω 10 Ω
 1000 Ω 120 Ω

WIRE CONFIGURATION

- 2-wire 4-wire 3-wire
 3-wire 2-wire (Dual) (Dual)

LEAD LENGTH (SPECIFY)

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
 1 week expedited mfg
 3-4 days expedited mfg
 1-2 days expedite mfg
 Same day expedited mfg

BRACKET TYPE

- Straight brass mounting bracket (10MM wide x 16MM long)
 Straight brass mounting bracket (0.75" x 1.25" long)
 90 degree brass mounting bracket (10MM wide x 16MM long)
 Custom

LEAD WIRE MATERIAL

- Fiberglass (800°F)
 Teflon (400°F)
 Fiberglass with stainless steel braid (800°F)
 Teflon with stainless steel braid (400°F)
 Fiberglass with armor cable (800°F)
 Teflon with armor cable (400°F)
 Fiberglass with stainless steel braid (800°F) w/ armor cable
 Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads Standard female jack (400°F)
 Fork Terminals Miniature male plug (400°F)
 Standard male plug (400°F) Miniature female jack (400°F)

SPECIAL FEATURES

- None
 Epoxy seal
 Cable Clamp
 Bix Connector
 Mating connector
 Moisture protection boot on connector

QUANTITY