




CUT TO LENGTH RTDS

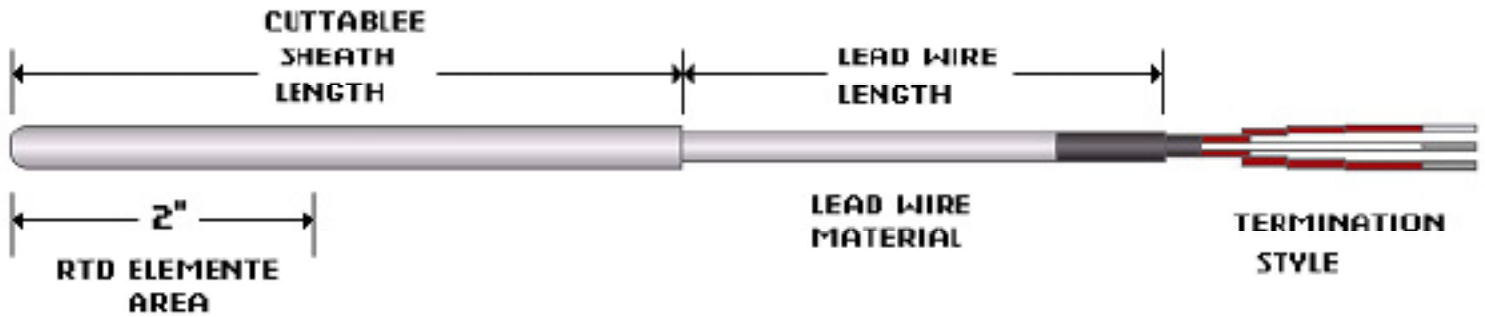

NAME:

ELEMENT TYPE

- 100 Ω
- 1000 Ω

WIRE CONFIGURATION

- 2-wire
- 3-wire
- 4-wire

SHEATH LENGTH

Length:

Units:

LEAD LENGTH (SPECIFY)

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

SHEATH DIAMETER

- 0.118" (3mm)
- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.196" (5mm)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- 0.314" (8mm) (5/16")
- 0.375" (9.5mm) (3/8")
- Custom

LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads

QUANTITY