




HEAD & GROOVE RTD'S

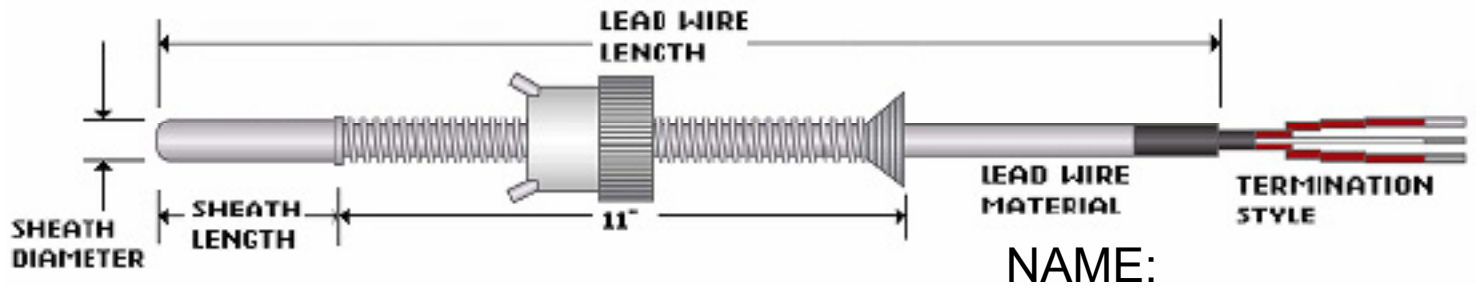

ELEMENT TYPE

- 100 Ω 120 Ω
- 1000 Ω 10 Ω
- 500 Ω

WIRE CONFIGURATION

- 2-wire 4-wire 3-wire
- 3-wire 2-wire (Dual) (Dual)

SHEATH LENGTH

- 1/4" 5/8"
- 3/8 (standard)" 3/4"
- 1/2" 1"

CAP STYLE

- 12MM OD Double eared cap

LEAD LENGTH (SPECIFY)

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

THREADED ADAPTER

- 1/4"BSP threaded fitting (Mates with 12MM Double eared cap)
- No Fitting

SHEATH DIAMETER

- 0.188" (4.8mm) (3/16") (standard) 0.314" (8mm) (5/16")
- 0.236" (6mm) Custom
- 0.250" (6.4mm) (1/4")

LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector

QUANTITY