




NOZZLE / THREADED BOLT RTD'S

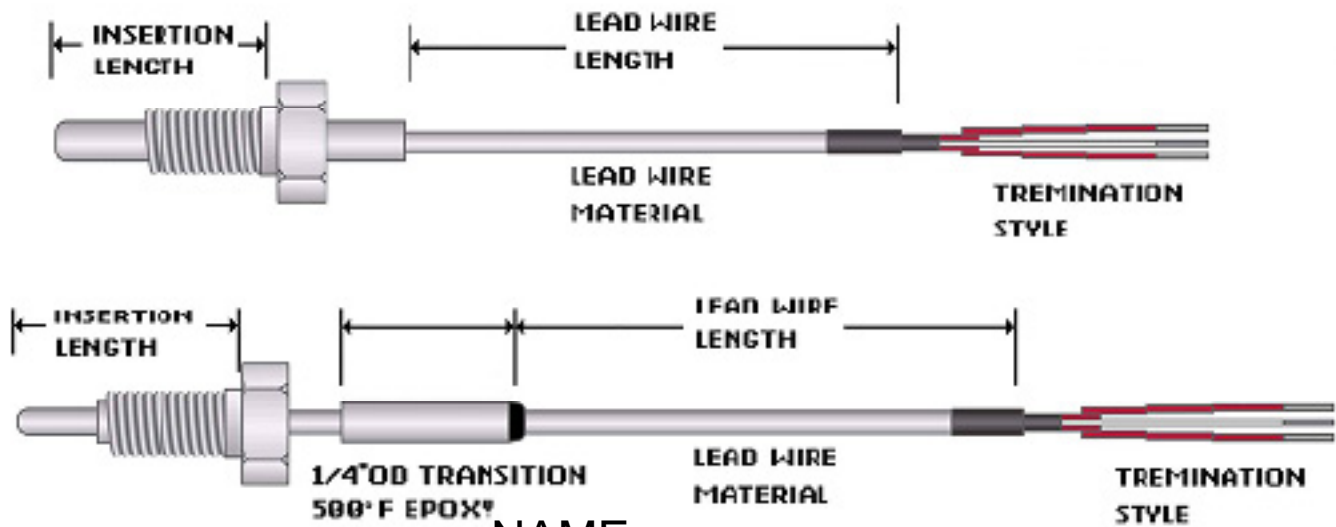

NAME:

ELEMENT TYPE

- 100 Ω
- 120 Ω
- 1000 Ω
- 10 Ω
- 500 Ω

WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire
- 2-wire (Dual)
- (Dual)

LEAD LENGTH (SPECIFY)

Length:

Units:

INSERTION LENGTH

- Doesn't Matter
- 3/4"
- 1/2"
- 1"
- 5/8"

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

QUANTITY

THREAD SIZE

- 1/4-28 (Standard)
- 1/4-20
- 1D-32 (Grounded only)
- 8-32 (Grounded only)
- M5 X 0.8 pitch
- M6 x 1 pitch
- M8 x 1 pitch
- M8 x 1.25 pitch
- M10 x 1 pitch
- M10 x 1.25 pitch
- M10 x 1.5 pitch
- M12 x 1.25 pitch
- M12 x 1.5 pitch
- M12 x 1.75 pitch
- 1/2-20
- 1/8"npt
- Custom

LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector