




RECTANGULAR MOUNTING FLANGE RTDS

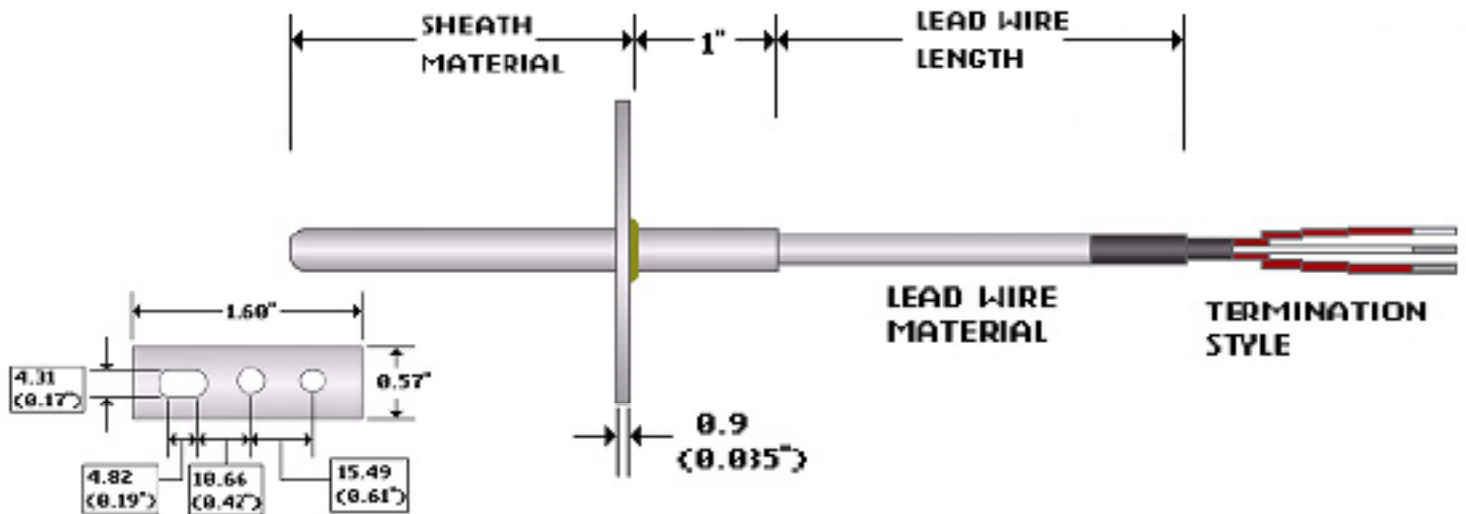

NAME:

ELEMENT TYPE

- 100 Ω
- 500 Ω
- 10 Ω
- 1000 Ω
- 120 Ω

WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire (Dual)
- 2-wire (Dual)

MOUNTING FLANGE

- 1.60" long x 0.57" wide
- Custom

LEAD LENGTH

Length:

Units:

INSERTION LENGTH

Length:

Units:

REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

SHEATH DIAMETER

- 0.125" (3.2mm) (1/8")
- 0.156" (4mm)
- 0.188" (4.8mm) (3/16") (standard)
- 0.236" (6mm)
- 0.250" (6.4mm) (1/4")
- Custom

LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector

QUANTITY