




RIGID SHEATH W/ OPTIONAL FITTING & LEAD WIRE RTDS

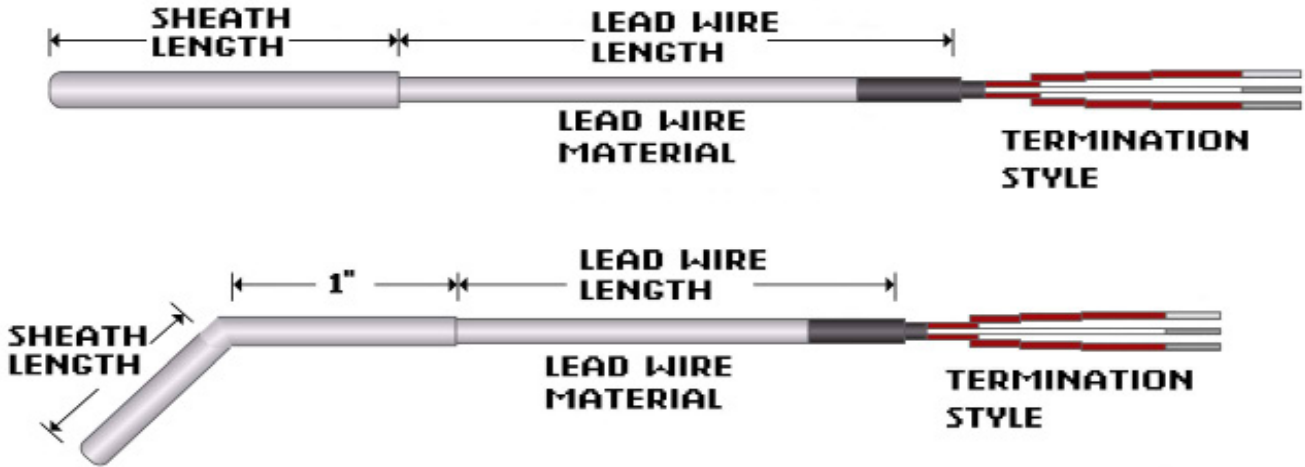

NAME:

ELEMENT TYPE

100 Ω 120 Ω
 1000 Ω 10 Ω
 500 Ω

WIRE CONFIGURATION

2-wire 2-wire (Dual)
 3-wire 3-wire (Dual)
 4-wire

SHEATH CONFIGURATION

Straight 90 Degree
 45 Degree

SHEATH LENGTH (SPECIFY)

Length:

Units:

QUANTITY

TERMINATIONS/OPTIONS

Stripped Leads	Standard female jack (400°F)
Fork Terminals	Miniature male plug (400°F)
Standard male plug (400°F)	Miniature female jack (400°F)

SHEATH DIAMETER

0.118" (3mm)	0.236" (6mm)
0.125" (3.2mm) (1/8")	0.250" (6.4mm) (1/4")
0.156" (4mm)	0.314" (8mm) (5/16")
0.188" (4.8mm) (3/16") (standard)	0.375" (9.5mm) (3/8")
0.196" (5mm)	Custom

LEAD WIRE MATERIAL

Fiberglass (800°F)	Teflon with armor cable (400°F)
Teflon (400°F)	Fiberglass with stainless steel braid (800°F) w/ armor cable
Fiberglass with stainless steel braid (800°F)	Teflon with Stainless steel braid (400°F) w/ armor cable
Teflon with stainless steel braid (400°F)	
Fiberglass with armor cable (800°F)	

SHEATH LENGTH (SPECIFY)

Length:

Units:

