




# RING TERMINAL RTD'S

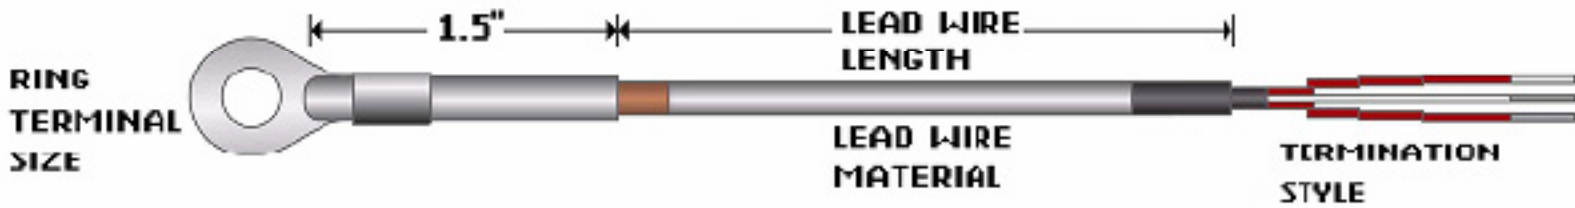

NAME:

### ELEMENT TYPE

- 100 Ω
- 500 Ω
- 10 Ω
- 1000 Ω
- 120 Ω

### WIRE CONFIGURATION

- 2-wire
- 4-wire
- 3-wire
- 3-wire
- 2-wire (Dual)
- (Dual)

### RING TERMINAL SIZE

- #6 (D. 147" hole size)
- #8 (D. 173" hole size)
- #10 (D. 198" hole size)
- 1/4" (D. 263" hole size)
- 5/16" (D. 336" hole size)
- 3/8" (D. 393" hole size)
- 1/2" (D. 515" hole size)

### LEAD LENGTH (SPECIFY)

Length:

Units:

### REQUIRED LEAD TIME

- 1.5-2 weeks (standard)
- 1 week expedited mfg
- 3-4 days expedited mfg
- 1-2 days expedite mfg
- Same day expedited mfg

### LEAD WIRE MATERIAL

- Fiberglass (800°F)
- Teflon (400°F)
- Fiberglass with stainless steel braid (800°F)
- Teflon with stainless steel braid (400°F)
- Fiberglass with armor cable (800°F)
- Teflon with armor cable (400°F)
- Fiberglass with stainless steel braid (800°F) w/ armor cable
- Teflon with Stainless steel braid (400°F) w/ armor cable

### TERMINATIONS/OPTIONS

- Stripped Leads
- Fork Terminals
- Standard male plug (400°F)
- Standard female jack (400°F)
- Miniature male plug (400°F)
- Miniature female jack (400°F)

### SPECIAL FEATURES

- None
- Flat tip probe
- Drill point tip
- Epoxy seal
- Cable Clamp
- Bx Connector
- Mating connector
- Moisture protection boot on connector

### QUANTITY