




SHIM STYLE RTDS

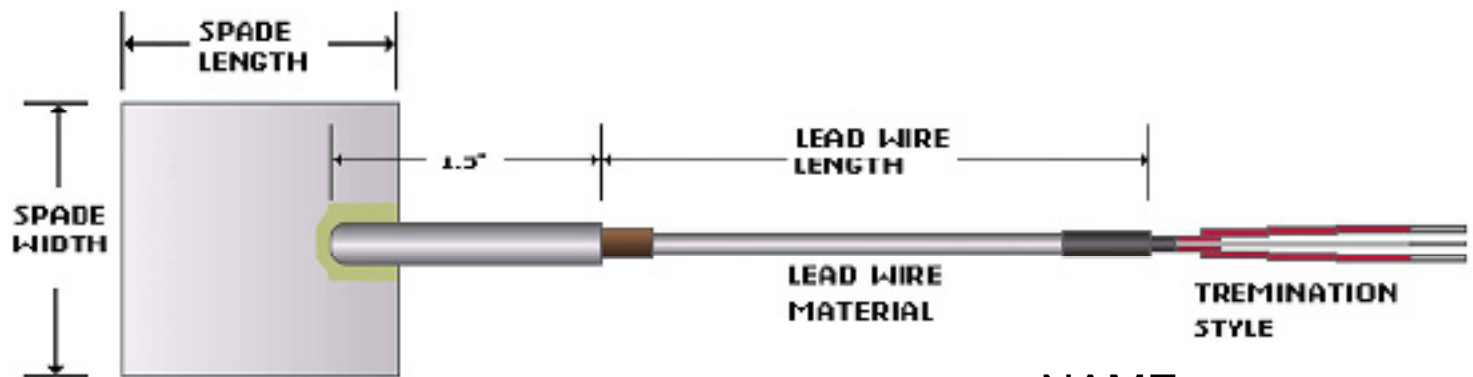

NAME:

ELEMENT TYPE

- ☐ 100 Ω ☐ 120 Ω
☐ 1000 Ω ☐ 10 Ω
☐ 500 Ω

SPADE SIZE

- ☐ 1/2" x 1/2" ☐ 1" x 1" ☐ 3/4" x 1" ☐ Custom
☐ 5/8" x 5/8" ☐ 3/4 x 7/8" ☐ 1/2" x 1"
☐ 3/4" x 3/4" ☐ 1/2" x 5/8" ☐ 2" x 2"

WIRE CONFIGURATION

- ☐ 2-wire ☐ 4-wire ☐ 3-wire
☐ 3-wire ☐ 2-wire (Dual) (Dual)

LEAD WIRE MATERIAL

- ☐ Fiberglass (800°F)
☐ Teflon (400°F)
☐ Fiberglass with stainless steel braid (800°F)
☐ Teflon with stainless steel braid (400°F)
☐ Fiberglass with armor cable (800°F)
☐ Teflon with armor cable (400°F)
☐ Fiberglass with stainless steel braid (800°F) w/ armor cable
☐ Teflon with Stainless steel braid (400°F) w/ armor cable

LEAD LENGTH

Length:

Units:

TERMINATIONS/OPTIONS

- ☐ Stripped Leads ☐ Standard female jack (400°F)
☐ Fork Terminals ☐ Miniature male plug (400°F)
☐ Standard male plug (400°F) ☐ Miniature female jack (400°F)

SPECIAL FEATURES

- ☐ None ☐ Bx Connector
☐ Epoxy seal ☐ Mating connector
☐ Cable Clamp ☐ Moisture protection boot on connector

QUANTITY

REQUIRED LEAD TIME

- ☐ 1.5-2 weeks (standard)
☐ 1 week expedited mfg
☐ 3-4 days expedited mfg
☐ 1-2 days expedite mfg
☐ Same day expedited mfg