


A700 - RING TERMINAL THERMOCOUPLES + RTD's

A700 STYLE - RING TERMINAL

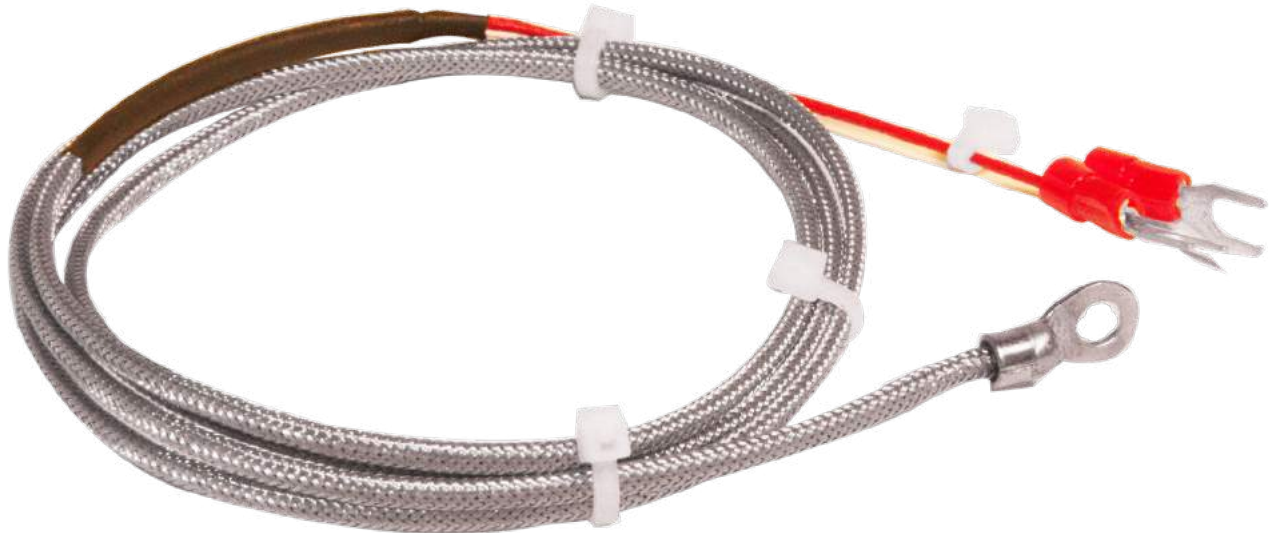

STANDARD FEATURES

3/16" or 5/16" DIAMETER RING
 GROUNDED SENSOR
 24 AWG FIBERGLASS LEADS
 WITH STAINLESS STEEL BRAID
 STRIPPED LEADS

OPTIONS - A700

THERMOCOUPLE TYPE OPTIONS

Type J Type K
 Type T 2 or 3 Wire RTD

48,72,96,120" ARMOR
 CUSTOM

TERMINATION OPTIONS
 SEE NEXT PAGE

UNGROUNDING
 NIST TRACEABLE
 FIXED PIPE CLAMP


SPECIAL OPTIONS AVAILABLE UPON REQUEST

STOCK - A700


TYPE	JUNCTION	Length (A)	PART# (c/w bare wire)	PART# (c/w male plug)
J	Grounded	36"	A700J-X-36-0-B	A700J-X-36-2-B
J	Grounded	48"	A700J-X-48-0-B	A700J-X-48-2-B
J	Grounded	72"	A700J-X-72-0-B	A700J-X-72-2-B
J	Grounded	96"	A700J-X-96-0-B	A700J-X-96-2-B
J	Grounded	120"	A700J-X-120-0-B	A700J-X-120-2-B
J	Grounded	144"	A700J-X-144-0-B	A700J-X-144-2-B
J	Grounded	180"	A700J-X-180-0-B	A700J-X-180-2-B

**WE STOCK ALL A700 RING
 TERMINAL DIAMETERS.
 ***PLEASE SPECIFY WHEN
 ORDERING*****

A700 - DIMENSIONS

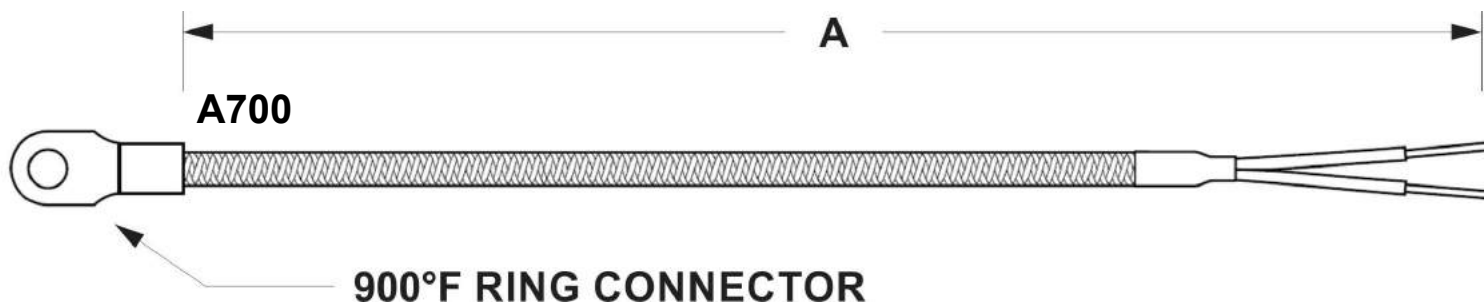


STUD SPECIFICATIONS

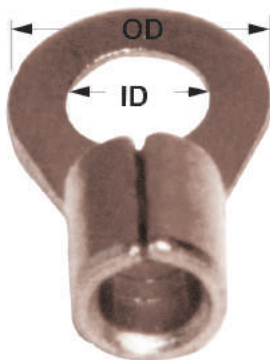

RING TERMINAL DIMENSIONS

CODE	RING SIZE	ID	OD
6	#6/ M3.5	0.138"	0.25"
8	#8/ M4	0.174	0.310
10	#10	0.195	0.375
1/4	1/4/ M6	0.26"	0.58"

TERMINATIONS

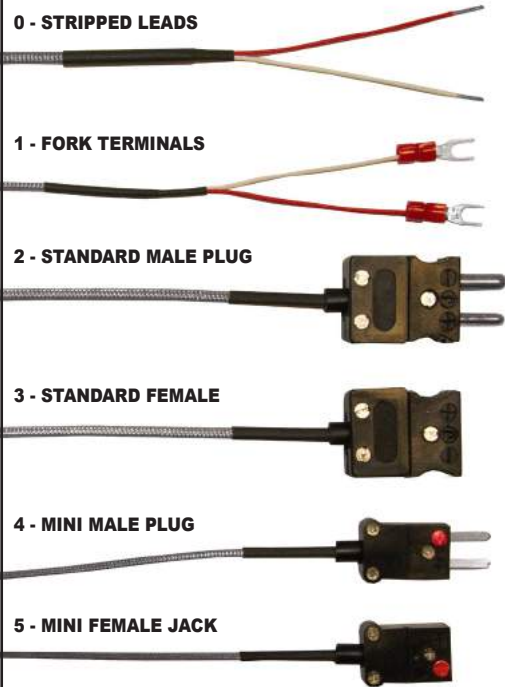

A700 - ORDER CODE

A700X	-	D	-	A	-	X	-	X	-	X
TYPE		RING TERMINAL		LENGTH		TERMINATION		LEADS		OPTIONS
J - TYPE J		6 - 0.138" / #6(3.5)		48 - 48"		0 - STRIPPED LEADS		F - FIBERGLASS		U - UNGROUNDED
K - TYPE K		8 - 0.164" / #8(M4)		72 - 72"		1 - FORK TERMINALS		B - STAINLESS BRAID		X - SPECIAL
T - TYPE T		10 - 0.19" / #10		96 - 96"		2 - STANDARD MALE PLUG		H - STAINLESS HOSE		C - NIST TRACEABLE
RTD2 - PT100		1/4 - 0.5" / 1/4(M6)		120 - 120"		3 - STANDARD FEMALE JACK		T - TEFLON		F - FIXED PIPE CLAMP
RTD3 - PT100				X - CUSTOM		4 - MINI MALE PLUG		S - FIBERGLASS STRANDED		
						5 - MINI FEMALE JACK				

****Standard Lead Time for Custom Parts 3-5 days MFG****
If you need something that is not listed, contact us! We can probably make it